



C – T – W – 0024-0110

مشروع انشاء بوستر الطيبه - محافظة اربد

وثائق العطاء

2024

آخر موعد لبيع وثيقة العطاء هو الساعة الثالثة والنصف من مساء يوم **الاثنين** الموافق

2024/12/23

آخر موعد لتقديم العروض على العنوان المذكور ادناه الساعة الثانية عشر ظهرا يوم

الاثنين الموافق **2024/12/30**

شركة مياه اليرموك
مديرية العطاءات والمشتريات
اربد - شارع بغداد
<http://www.yw.com.jo>

المحتويات

الموضوع	
دعوه العطاء	الجزء الاول
كتاب التفويض	الجزء الثاني
تعليمات دخول العطاء	الجزء الثالث
الشروط العامة (غير مرفقة) والشروط الخاصة : أ- التعليمات للمناقصين ب- الشروط الخاصة ج- نماذج الاتفاقيات والضمانات	الجزء الرابع
المواصفات العامة والخاصة	الجزء الخامس
جداول الكميات	الجزء السادس
المخططات	الجزء السابع

الجزء الاول



إعلان دعوة عطاء

تعلن شركة مياه اليرموك عن عن طرح العطاءات ادناه فعلى الراغبين من ذوي الاختصاص بالاشتراك بهذه العطاءات مراجعة مقر الشركة / اربد - شارع بغداد مصطحبين معهم شهادة التصنيف ورخصة مهن سارية المفعول و شهادة غرفة التجارة و السجل التجاري (النسخ الأصلية أو صورة مصدقة) وتفويض للحصول على وثائق دعوة العطاء. اعتبارا من صباح يوم **الأحد الموافق 2024/12/15** وحسب الشروط التالية:-

رقم دعوة العطاء	وصف العمل	التصنيف	كفالة الدخول	ثمن النسخة غير مسترد (دينار)	آخر موعد لتقديم العروض الساعة الثانية عشر ظهرياً
C-T-W-2024-0110	مشروع انشاء بوستر الطيبه- محافظة اربد	خامسه او رابعه مياه و صرف صحي	3% من قيمة العرض	25خمسه و عشرون دينار	الاثنين 2024/12/30

- ✓ آخر موعد لبيع نسخ العطاءات الساعة الثالثة والنصف مساء يوم **الاثنين الموافق 2024/12/23**.
- ✓ تفتح العروض من قبل لجنة العطاءات المختصة بحضور من يرغب من المناقصين.
- ✓ على من يرغب التقدم للعطاء مراجعة إدارة شركة مياه اليرموك للحصول على أية معلومات تخص العطاءات .
- ✓ على العنوان التالي اربد- شارع بغداد -مقابل محطة رمضان للمحروقات. تليفكس رقم: 02/7246859 او الایمیل الإلكتروني : الموقع الإلكتروني للشركة : <http://www.yw.com.jo>
- ✓ للتواصل مع مدير مديرية العطاءات و المشتريات : المهندس بسام جربوع : 0799240475
- ✓ آخر موعد للاستفسارات الخاصة بالعطاء يوم **الأربعاء الموافق 2024/12/18**
- ✓ يحق لشركة مياه اليرموك إلغاء العطاء أو إعادة الطرح دون إبداء أية أسباب ودون تحملها أدنى مسؤولية
- ✓ على المقاول إحضار شهادة تصنيف المقاولين سارية المفعول لمدة شهر من تاريخه .
- ✓ اجور الإعلان على من يرسو عليه العطاء مهما تكررت

مدير عام شركة مياه اليرموك
المهندس محمد سالم العمایرة

الجزء الثاني

مدير عام شركة مياه اليرموك

بناءً على دعوة العطاء رقم (C-T-W-0024-0110) وفقاً للتعليمات والشروط العامة والخاصة بها فإنني أقدم عرضي وأوافق على أن أقوم بتنفيذ مشروع انشاء بوستر الطيبه- محافظة اربد بالأسعار والشروط والمواصفات المبينة في هذا العرض

وإنني ألتزم بأن يظل هذا العرض قائماً لمدة () يوماً اعتباراً من 2024/.../... وأفوض السيد () بتمثيل مؤسستنا / شركتنا في كافة الإجراءات والتبليغات المتعلقة بهذا العرض لدى دائرتكم

المفوض بالتوقيع

إسم المناقص : ()
الخاتم :

العنوان : ()

ص . ب : () الرمز البريدي () هاتف () فاكس ()

المرفقات (أبين فيما يلي جميع المرفقات التي يتكون منها عرضي) :

- (1)
- (2)
- (3)
- (4)

ملاحظات :

1. يجب أن يعبأ هذا النموذج بالكامل وأن يرفق بالعرض عند تقديمه إلى الدائرة .

الجزء الثالث

تعليمات الدخول في العطاء

1. لا يسمح بالاشتراك إلا للشركات المصنفة و المعتمدة والمسجلة.
 2. على المتعهد عند تعبئة العرض المقدم منه القيام بالختم والتوقيع على كافة صفحات العطاء ومغلف عرض السعر المقدم وخلافا لذلك يستبعد العرض
 3. مدة سريان العرض لا تقل عن (120) يوماً من التاريخ المحدد كآخر موعد لإيداع العروض .
 4. على المناقص أو من يفوضه إحضار العرض المقدم من قبله في مغلف مغلق بإحكام ومختوم ومعنون بإسم :
 - ❖ شركة مياه اليرموك - مديرية العطاءات و المشتريات
 - ❖ العطاء رقم
 - ❖ اسم المناقص
 - ❖ العنوان
- و وضع المغلف شخصيا في الصندوق المخصص للعطاءات بحضور موظف العطاءات والتوقيع على سجل الايداع اصوليا".
5. لا تقبل العروض الواردة الى الشركة بالفاكس او البريد الالكتروني.
 6. على المناقصين التأكد من صفحات ومرفقات العطاء ومديرية العطاءات غير مسؤولة عن فقدان او نقص اي مرفق او صفحة بعد شراء وثائق العطاء و يتحمل المناقص مسؤولية عدم قيامه بالتدقيق و التأكد من اكتمال الوثائق .
 7. يعتبر تقديم عرض المناقص إلتزاماً منه بأنه مطلع ومتفهم لجميع المواد والتعليمات الصادرة بموجب سياسة العطاءات المشتريات لدى شركة مياه اليرموك وتعديلاته ووثائق دعوة العطاء والنماذج المرفقه.
 8. تقدم جميع الكفالات باسم شركة مياه اليرموك.
 9. المحاكم الاردنية هي الجهة القضائية الوحيدة المخولة بالنظر في أي دعوة قضائية تنشأ بين المتعاقدين.

شركة مياه اليرموك

مديرية العطاءات والمشتريات

اربد - شارع بغداد

<http://www.yw.com.jo>

الجزء الرابع

الشروط العامة والخاصة

الشروط العامة

الشروط العامة للدخول في العطاءات والتعاقد مع المتعهدين (تنفيذ الاشغال)

ملاحظة :- يتم اعتماد الشروط العامة للدخول في العطاءات والتعاقد مع المتعهدين لعطاءات الاشغال وفقا لدفتر شروط عقد المقاولة (الفيدك) و / او وفقا للنظام المعتمد في الشركة .

وزارة الأشغال العامة والإسكان دائرة العطاءات الحكومية

عقد المقاوله الموجز

الشروط العامة – غير مرفقه

(وعلى المناقص الذي يرغب بالحصول عليها مراجعة مديرية العطاءات

والمشتريات)

الشروط الخاصة –الجزء الثاني

عمان 2007

المقدمة:

لقد تم استقاء هذه الشروط التعاقدية من العقد الموجز الذي أعد من قبل الاتحاد الدولي للمهندسين الاستشاريين (فيديك) وقد قامت لجنة متخصصة بإدخال تعديلات بحيث تتلاءم مع الأنظمة والقوانين السائدة في الأردن ويوصى باستخدامها لمشاريع المباني والمشاريع الهندسية ذات القيمة الصغرى نسبياً واعتماداً على نوع العمل والظروف المحيطة به ، ويمكن استخدامها أيضاً لمشاريع بقيمة أكبر .

إن هذه الشروط يمكن أن تكون ملائمة للأشغال البسيطة نسبياً أو للأشغال المتكررة أو للأشغال قصيرة المدة،دون اللجوء إلى عقود المقاوله الفرعية المتخصصة.

إن الهدف من إعداد هذا النموذج هو إخراج وثيقة مرنة وشفافة تحتوي على جميع الأحكام التعاقدية الضرورية ، والتي يمكن استخدامها في جميع أشغال المباني أو الأشغال الهندسية تحت ظروف ترتيبات إدارية متنوعة. وبمعطيات هذا النموذج يقوم المقاول بتنفيذ الأشغال وفقاً للتصاميم المعدة من قبل صاحب العمل أو من يمثله،مع أنه من الممكن أيضاً أن يكون هذا النموذج مناسباً للعقود التي تشمل مقاولات يتم إعداد تصاميمها من قبل المقاول سواءً للأعمال المدنية أو الكهروميكانيكية.

يلاحظ كذلك بأن صاحب العمل لديه عدة خيارات فيما يتعلق بأساليب تقدير القيمة. ومع أنه لا يوجد إشارة إلى المهندس المحايد ،فإن لصاحب العمل الحق في تعيين مهندس مستقل ليعمل بصورة محايدة ،إذا رغب في ذلك.

يوصى باعتماد هذا النموذج للاستخدام العام،مع ملاحظة أن بعض الكيانات القانونية قد تتطلب إدخال تعديلات على شروطه .

مشروع انشاء بوستر الطيبه- محافظة اريد

إنّ اتفاقية العقد بصيغتها المقترحة تتضمن كتاب عرض المناقصة وصيغة قبولها في وثيقة واحده ، ويلزم بالتالي أن يتم إدراج المعلومات اللازمة عن المشروع في الملحق ، ومع أنّ الشروط العامة يتوقع أن تغطي معظم العقود ، إلاّ أنه بإمكان مستخدمي هذا النموذج إدخال شروط خاصة إذا رغبوا فيما يتعلق بالحالات أو الظروف الخاصة ، وعندما تصبح مجموعة الشروط العامة والشروط الخاصة شاملتين لحقوق والتزامات الفريقين ، ولهذا فقد يلزم الاستعانة بإرشادات الشروط الخاصة وكذلك اتفاقية فض الخلافات وقواعدها .

الشروط العامة الجزء الأول

تنويه: إنّ الشروط العامة الواردة في عقد المقاوله الموجز تم استقاؤها من الشروط التعاقدية التي أعدها الاتحاد الدولي للمهندسين الاستشاريين (فيديك / العقد الموجز)

عقد المقاوله الموجز

الجزء الثاني

أ- التعليمات للمناقصين

ب- الشروط الخاصة

ج- نماذج العرض والضمانات والإتفاقيات والبيانات

يعتبر هذا الجزء من دفتر عقد المقاوله الموحد متمماً للجزء الأول من العقد الموجز /
الشروط العامة .

إنّ ما يرد في هذه الشروط من إضافة أو إلغاء أو تعديل على مواد الشروط العامة يعتبر سائداً ويؤخذ به
بالقدر الذي يفسر أو يضيف أو يلغي أو يعدّل على تلك المواد.

أ	التعليمات للمناقصين	28
	وثائق العطاء	28
	إعداد وتقديم عروض المناقصات	28
	تقييم العروض وإحالة العطاء	30
	الضمانات (الكفالات)	31
ب	الشروط الخاصة	32
ج	نماذج الإتفاقيات والضمانات	34
ج 1	نموذج كتاب عرض المناقصة	35
ج 2	الملحق	36
ج 3	نموذج كفالة المناقصة	38

39	نموذج اتفاقية العقد	ج 4
40	نموذج اتفاقية فضّ الخلافات	ج 5
41	قواعد اتفاقية فضّ الخلافات	
44	نموذج ضمان الأداء (كفالة التنفيذ)	ج 6
45	نموذج ضمان إصلاح العيوب (كفالة الصيانة)	ج 7
46	نموذج إقرار بالمخالصة	ج 8
47	إقرار متعلق بالدفعات الأخرى	ج 9
48	إقرار متعلق بالدفعات الممنوعة	ج 10

أ. التعليمات للمناقصين

(1) يمكن للمقاولين الذين يحق لهم شراء نسخ المناقصة بموجب الإعلان عن طرح العطاء والراغبين بالاشتراك في المناقصة أن يتقدموا للحصول على نسخة من وثائق العطاء الموزعة مع الدعوة مقابل دفع ثمن النسخة المقرر .

(2) تشمل وثائق العطاء لهذا المشروع ما يلي :-

الجزء الاول	دعوه العطاء
الجزء الثاني	كتاب التفويض
الجزء الثالث	تعليمات دخول العطاء
الجزء الرابع	الشروط العامة (غير مرفقة)
	الشروط الخاصة :
	أ- التعليمات للمناقصين
	ب- الشروط الخاصة
	ج- نماذج الاتفاقيات والضمانات
الجزء الخامس	المواصفات العامة والخاصة
الجزء السادس	القائمة السوداء
الجزء السابع	جداول الكميات
الجزء الثامن	المخططات

إعداد وتقديم عروض المناقصات

طريقة تقديم العروض:

(3) ينبغي على من يرغب بالاشتراك في هذه المناقصة أن يقوم بزيارة موقع العمل ، وأن يتعرف عليه وأن يحصل بنفسه وعلى مسؤوليته ونفقاته الخاصة، على جميع المعلومات اللازمة له لتقديم العرض ، وأن يتفهم ماهيتها والظروف المحيطة بالمشروع وسائر العادات المحلية ، وظروف العمل ، وكل الأمور الأخرى التي لها علاقة بالمناقصة ، أو تلك التي تؤثر على وضع أسعار عرضه .

1- يقدم العرض على نموذج عرض المناقصة المدرج في هذا الدفتر ، ويقوم المناقص بتعبئة النموذج وجداول الكميات والأسعار وأي ملاحق أخرى ويوقع وثائق المناقصة في الأماكن المحددة لذلك .

ب-يشترط أن يكون تعبئة خانة أسعار الوحدة في جداول الكميات بالأرقام والكلمات بخط واضح .

ج- لا يجوز إدخال أي تعديل على وثائق العطاء من قبل المناقص ، وإذا أجرى المناقص أي تعديل أو إذا أخلّ بأي من هذه التعليمات ، فإنّ ذلك يؤدي إلى رفض عرضه .

(4) يجب على المناقص أن يقدم عرضه على النسق المطلوب في هذه التعليمات ودعوة العطاء وأن يشتمل العرض على البيانات والمعلومات التالية :
عنوان المناقص الرسمي الكامل .

وضع منشأة المناقص فرداً كان أو شركة وكتاب التفويض للمسؤول المفوض بالتوقيع عنها .

ج- خبرة المناقص ومؤهلاته ، مع بيان وصف المشاريع التي سبق وأن أنجزها ، والمشاريع الملتمزم بها حالياً ، وبيان نسب إنجازها بأرقام واقعية .

د- يرفق مع العرض المقدم كفالة مالية أو شيك مصدق لصالح صاحب العمل ولأمره، بالمبلغ المحدد في الملحق كدليل على جدية التزام المناقص للدخول في المناقصة ، وعلى أن تكون تلك الكفالة صادرة عن بنك مرخص له للعمل في الأردن .

مشروع انشاء بوستر الطيبه- محافظة اريد

تعاد هذه الكفالات للمناقصين الذين لم يحل عليهم العطاء ، حسبما تقرره اللجنة خلال(7) أيام من تاريخ إحالة العطاء أو انتهاء صلاحية كفالة المناقصة أيهما أسبق ، أما المناقص الذي يحال ليه العطاء فتعاد إليه هذه الكفالة بعد أن يقدم ضمان الأداء وقوع العقد .
هـ- أي معلومات أو بيانات أخرى يطلب إلى المناقص تقديمها أو إرفاقها بعرضه إذا كانت مطلوبة بموجب الشروط الخاصة الإضافية أو المواصفات الخاصة أو هذه التعليمات .

(5)تعتبر الأسعار التي يدونها المناقص أمام البنود في جدول الكميات على أنها القيمة الكلية كل من تلك البنود بصورة منجزة قابلة للتسليم ، وأنها تشمل كذلك الأعمال التمهيدية (Preliminaries) .

(6)توضيح الالتباس:

إذا كان هناك أي التباس أو تناقض في وثائق العطاء، أو كانت هناك حاجة لتوضيح أي غموض في وثائق العطاء ، فعلى المناقص أن يتقدم بطلب خطي إلى رئيس لجنة العطاءات المختصة من أجل التوضيح وإزالة الالتباس في موعد يسبق التاريخ المحدد لفتح العطاء بما لا يقل عن (7) أيام ، ويتم توزيع الإجابة على الاستفسارات على جميع المناقصين المتقدمين للعطاء ، ولا يجوز أن يتخذ مثل هذا التوضيح مبرراً لطلب تمديد الموعد المحدد لتقديم العرض .

(7)إيداع العروض:

يقدم العرض متكاملًا وفي ظرف مختوم عليه من الخارج عطاء

() الخاص بمشروع :

واسم المقاول ويودع في صندوق العطاءات الذي تحدده لجنة العطاءات المختصة في إعلانها عن العطاء وذلك في أو قبل الموعد والتاريخ المحددين للإيداع .

ب-إنّ أي عرض يقدم بعد موعد الإيداع يرفض ويعاد إلى صاحبه مقللاً .

ج-تفتح العروض عادة في جلسة علنية بحضور من يرغب من المناقصين ، إلاّ إذا نص في دعوة العطاء على اتباع أسلوب آخر .

(8) إلزامية العروض:

يعتبر العرض المقدم ملزماً للمناقص ولا يجوز سحب هذا العرض بعد تقديمه ويظل العرض ملزماً للمناقص الذي تقدم به لفترة (120) يوماً ابتداءً من تاريخ إيداع العروض إلاّ إذا حدد في دعوة العطاء مدة التزام أطول من هذه المدة .

(9) عملات الدفع وسعر المناقصة :

على المناقص تقديم أسعاره بالدينار إلاّ إذا نص على غير ذلك في شروط دعوة العطاء.

تقييم العروض وإحالة العطاء

(10) تقييم العروض:

يتم دراسة عروض المناقصات وتقييمها بموجب تعليمات العطاءات الحكومية الصادرة بموجب نظام الأشغال الحكومية ، ويفترض في المناقص أن يكون على إطلاع ودراية بهذه التعليمات .

(11) أسلوب تدقيق العروض :

مشروع انشاء بوستر الطيبه- محافظة اريد

- أ- إذا وجد في العرض خطأ أو تناقض بين حساب جملة أي مبلغ وما يجب أن تكون عليه هذه ، فللجنة المختصة الحق بتعديل جملة المبلغ بما يتفق وتطبيق سعر الوحدة وبالتالي يتم تعديل مجموع الأسعار أو المبلغ الإجمالي للعطاء وفقاً لذلك .
- ب- إذا اختلف العدد المذكور بالأرقام عن المذكور كتابة بالكلمات ، فتعتبر كتابة الكلمات هي الملزمة وتصحح القيمة تبعاً لذلك ، إلا إذا كانت القيمة بالكلمات غير معقولة .
- ج- إذا وجد خطأ في أي من العمليات الحسابية ، فإنه يتم تصحيح المجموع ويكون المجموع المصحح ملزماً للمناقص .
- د- إذا وجد أنّ المناقص لم يقدّم بتسعير بند أو أكثر من البنود ، فإنه يحق للجنة المختصة إما رفض العرض أو اعتبار تلك البنود غير المسعرة وكأنها محملة على بنود العطاء الأخرى ، وعلى المناقص تنفيذها (فيما إذا أحيل عليه العطاء) بدون مقابل .
- هـ- إذا قام المناقص بتسعير بند بصورة مغلوطة أو مبالغ فيها ، فللجنة المختصة الحق بما يلي :-
- 1- رفض العرض ، أو
 - 2- تعديل الأسعار بمعرفة المقاول مستأنسة بأسعار السوق الدارجة وأسعار المناقصين الآخرين (شريطة أن تبقى القيمة الإجمالية للعرض بعد التعديل مساوية أو أقل من قيمة العرض بعد التدقيق الحسابي) .

(12) تحتفظ لجنة العطاءات المختصة بحقها في إهمال أي عرض غير متقيد بما ورد في هذه التعليمات ، كما تمارس صلاحياتها بموجب أحكام نظام الأشغال الحكومية وإحالة العطاء دون التقيد بأقل العروض قيمة ، ويتم كل ذلك دون أن يكون لأي مناقص لم يُقدّم بالعطاء أي حق في مطالبة صاحب العمل بأي تعويض إزاء ذلك .

الضمانات (الكفالات)

(13) ضمان الأداء (كفالة التنفيذ) :

مشروع انشاء بوستر الطيبه- محافظة اربد

على المناقص الفائز بالعطاء أن يقوم بتوقيع العقد خلال فترة (14) يوماً من تاريخ إبلاغه خطياً بإحالة العطاء عليه أو تلزيمه له ، وعلى المناقص أن يقدم إلى صاحب العمل ضمان الأداء عند توقيع اتفاقية العقد حسب نموذج الضمان المرفق ، وتكون قيمة هذا الضمان الصادر عن أحد البنوك المرخصة للعمل في الأردن بالقيمة المحددة في الملحق وذلك ضماناً لتنفيذ التزامات العقد تنفيذاً تاماً ، ولدفع ما قد يترتب على المقاول وفاء لأغراض العقد .

إذا رفض المناقص أو تأخر عن توقيع اتفاقية العقد ، أو عجز عن تقديم ضمان الأداء المطلوب ، فعندها يحق لصاحب العمل مصادرة كفالة المناقصة المرفقة بعرضه دون الرجوع إلى القضاء ، ولا يكون للمناقص أي حق في المطالبة بها أو بأي تعويض بشأنها.

(14) ضمان إصلاح العيوب (كفالة الصيانة):

على المقاول أن يقدم لصاحب العمل عند تسلمه الإشعار بتسلم الأشغال ، ضمان إصلاح العيوب (كفالة الصيانة) بقيمة 5% من قيمة الأشغال المنجزة ، لضمان قيامه بتنفيذ أعمال إصلاح العيوب واستكمال النواقص والصيانة المطلوبة للمدة المنصوص عليها في ملحق عرض المناقصة ، وبحيث تكون صادرة عن بنك مرخص للعمل في الأردن ، وبتسليم هذه الكفالة لصاحب العمل يُعاد للمقاول ضمان الأداء المنوه عنه أعلاه .

ب- الشروط الخاصة

■ وصف المشروع موضوع هذا العطاء :

كما جاء في الجزء الثالث / المواصفات الفنية الخاصة ومتطلبات صاحب العمل

■ جهاز المقاول المنفذ:

يتعين على المقاول أن يعين الجهاز المنفذ التالي كحد أدنى، وبحيث يكون هذا الجهاز متفرغا للعمل في الموقع طيلة مدة تنفيذ المشروع، وأن تكون لديه المؤهلات والخبرات المدونة أدناه في مجال الإشراف أو التنفيذ أو كليهما على مشاريع مماثلة:

الرقم	الوظيفة	المؤهل العلمي	سنوات الخبرة	العدد المطلوب	مبلغ الحسم / دينار / يوم
1-	ممثل المقاول	هندسة مدنية			
2-	مهندس موقع	هندسة مدنية	حديث تخرج	1	50
3-	مهندس موقع	هندسة ميكانيكية			
4-	مراقب	كلية جامعية متوسطة	5	1	25
5-	مساح	كلية جامعية متوسطة	5	1	25
6-	قياس	ثانوية عامة			

■ الأشغال المؤقتة المطلوبة من المقاول :

.....
.....

.....
.....
■ المواد الاضافية الخاضعة لتعديل الاسعار بسبب تغير التكاليف :

لا تطبق المادة (5/11) والخاصة بتعديل الاسعار في هذا العطاء ولا يحق للمقاول المطالبة باية تعويضات مالية نتيجة تغير اسعار المواد.

شروط خاصة اضافة

- جميع البنود الواردة في جدول الكميات هي بنود سعر ثابت ويحق لصاحب العمل زيادة او تقليل الكميات في اي بند بدون دفع اي علاوات اضافة للمقاول وعليه فان المادة رقم 6/10 (تعديل اسعار البنود (اضافة)) من عقد المقاول لا تنطبق على هذا العطاء.

- على المقاول الالتزام ببرنامج العمل المقدم في بداية العطاء لتنفيذ الاعمال المطلوبة ضمن المدة الزمنية الموافقة عليها من قبل الاستشاري و / او صاحب العمل ولن تكون التعاميم التي تصدرها وزارة الاشغال العامة والاسكان خلال مدة التنفيذ والخاصة بتمديد مدة العطاء لاسباب الظروف الجوية ملزمة في هذا العطاء وذلك استنادا لكتاب دولة رئيس الوزراء رقم 17497/1/3/57 تاريخ 2009/9/23 واية تمديدات للمدة ستكون استنادا الى الشروط التعاقدية الواردة في العطاء.

- جميع أعمال الحفر وإعادة الوضع تكون بموجب تعليمات ومواصفات وزارة الاشغال العامة والاسكان وجميع تكاليف التنفيذ أعلاه مشمولة ضمن سعر المتر الطولي للتنفيذ وحسب ما هو وارد بجدول الكميات وحسب كتاب معالي وزير المياه والري رقم 8390/2/7 تاريخ 2015/7/2 ومرفقاته بهذا الخصوص والمرفقة بالعطاء وعددها (6) صفحات وحسب المخططات المرفقة في حال العمل ومسار الخط يكون في الشوارع التابعة لوزارة الاشغال العامة والاسكان.

- على المقاول احضار براءة الذمة من كافة الجهات الرسمية ذات العلاقة ولن يتم صرف المطالبة النهائية قبل احضار براءة الذمة من جميع الجهات المعنية ويتحمل المقاول اي تاخير زمني نتيجة ذلك .

ج- نماذج الاتفاقيات والضمانات

ج-1 نموذج كتاب عرض المناقصة Letter of Tender

المشروع:

إلى السادة (صاحب العمل) :

لقد قمنا بزيارة الموقع والتعرف على الظروف المحيطة به ، كما قمنا بدراسة شروط العقد ، والمواصفات ، والمخططات وجداول الكميات ، وملحق عرض المناقصة ، وملحق العطاء المتعلقة بتنفيذ أشغال المشروع المذكور أعلاه . ونعرض نحن الموقعين أدناه أن نقوم بتنفيذ الأشغال وإنجازها وتسليمها وإصلاح أية عيوب فيها وفقاً لهذا العرض الذي يشمل كل هذه الوثائق المدرجة أعلاه مقابل مبلغ إجمالي وقدره : أو أي مبلغ آخر يصبح مستحقاً لنا بموجب شروط العقد .

نوافق على الالتزام بعرض المناقصة هذا لمدة (120) يوماً من تاريخ إيداع العروض ، وأن يظل العرض ملزماً لنا ، ويمكنكم قبوله في أي وقت قبل انقضاء مدة الالتزام هذه ، كما نقر بأن ملحق عرض المناقصة يشكل جزءاً لا يتجزأ من كتاب المناقصة " . نتعهد في حالة قبول عرضنا ، أن نقدم ضمان الأداء المطلوب بموجب المادة (4/4) من شروط العقد ، وأن نباشر العمل بتاريخ أمر المباشرة ، وأن ننجز الأشغال ونسلمها ونصلح أية عيوب فيها وفقاً لمتطلبات وثائق العقد خلال " مدة الإنجاز " . وما لم يتم إعداد وتوقيع اتفاقية رسمية فيما بيننا ، وإلى أن يتم ذلك فإن " كتاب عرض المناقصة" هذا مع " كتاب القبول أو قرار الإحالة الذي تصدرونه ، يعتبر عقداً ملزماً فيما بيننا وبينكم . ونعلم كذلك بأنكم غير ملزمين بقبول أقل العروض قيمة أو أي من العروض التي تقدم إليكم .

حرر هذا العرض في اليوم : من شهر :/عام/.....

توقيع المناقص :

شاهد:

ج - 2 الملحق

■ يعتبر هذا الملحق جزءاً من اتفاقية العقد .

ملاحظة: باستثناء البنود التي تمت تعبئتها وفقاً لمتطلبات صاحب العمل ، فإنّ المقاول ملزم باستكمال البيانات التالية قبل تقديم عرضه .

المادة	الموضوع	البيان
2/1/1	المواصفات	المواصفات الفنية العامة والخاصة المتعلقة 1. الأبنية 2. الطرق 3. المياه والمجاري
3/1/1	المخططات	
	كفالة الدخول في المناقصة	3% من قيمة العرض المقدم
9/1/1	مدة الإنجاز	(60) يوماً تقويمياً
3/1	أولوية وثائق العقد	1- الاتفاقية 2- الشروط الخاصة 3- الشروط العامة 4- المواصفات 5- المخططات 6- تصميم المقاول (إن وجد) 7- جداول الكميات
4/1	القانون الذي يحكم العقد	القانون الأردني
5/1	لغة العقد	اللغة العربية
1/2	توفير الموقع	بتاريخ المباشرة

	ممثل صاحب العمل	1/3
	المهندس	2/3
	ضمان الأداء (كفالة حسن التنفيذ) - القيمة	4/4
	كفالة إصلاح العيوب (كفالة الصيانة) (5%) قيمة الأشغال المنجزة	
	متطلبات تصميم المقاول (إن وجد التصميم)	1/5
	برنامج العمل - على المقاول تقديمه- النموذج	2/7
	تعويضات التأخير - القيمة	4/7
	(40) دينار عن كل يوم تأخير - الحد الأقصى	
	فترة الإشعار بإصلاح العيوب (فترة الصيانة)	1/9
	المادة (2/8) 365 يوماً من تاريخ إنجاز الأشغال بموجب	
	التغييرات: العمل بالميأومة	2/10
	تقدير قيمة الأشغال ■ بالكيل مع جدول الكميات ■ بالمقطوع	1/11
	النسبة المئوية مقابل التحضيرات	2/11
	الحد الأدنى لقيمة الدفعة المرحلية 7000 دينار	3/11
	نسبة المبالغ المحتجزة (5%) من قيمة كل دفعة	4/11
	عملة الدفع الدينار الأردني	7/11

	الفائدة القانونية على الدفعات المتأخرة	8/11
	التأمينات المطلوب من المقاول استصدارها	1/14
	أ- الأشغال بما فيها المواد والتجهيزات	
	ب- معدات المقاول	
	ج- ضد الطرف الثالث	
	د- المستخدمين والعمال	
	سلطة تعيين مجلس فض الخلافات (إذا لم يتم الإتفاق على تعيينها)	1/15
	التحكيم :	3/15
	القانون الواجب التطبيق	
	مكان التحكيم	
	لغة التحكيم	
	عدد المحكمين	
	بموجب قانون المملكة الأردنية الهاشمية	
	الأردن	
	اللغة العربية	
	واحد	

ج - 3 نموذج كفالة المناقصة

Form of Tender Guarantee

المشروع:

إلى السادة (صاحب العمل):

لقد تم إعلامنا أنّ المناقص :شركة: سيتقدم بعرض للمناقصة للمشروع المنوه عنه أعلاه استجابة لدعوة العطاء ، ولما كانت شروط العطاء تنص على أن يتقدم المناقص بكفالة مناقصة مع عرضه ، وبناء " على طلبه ، فإنّ مصرفنا:

بنك يكفل بتعهد لا رجعة عنه أن يدفع لكم مبلغ عند ورود أول طلب خطي منكم وبحيث يتضمن الطلب ما يلي :-

أ- أنّ المناقص ، بدون موافقة منكم ، قام بسحب عرضه بعد انقضاء آخر موعد لتقديم العروض أو قبل انقضاء صلاحية العرض المحددة بـ (120) يوماً ، أو

ب- بأنّ المناقص قد رفض تصحيح الأخطاء التي وردت في عرضه بما يتوافق مع الشروط المحددة لتدقيق العروض في التعليمات الموجهة إلى المناقصين ، أو

ج- أنكم قد قتم بإحالة العطاء عليه ، ولكنه أخفق في إبرام اتفاقية العقد ، أو

د- أنكم قد قتم بإحالة العطاء عليه ، ولكنه أخفق في تقديم ضمانات الأداء بموجب شروط العقد،

وعلى أن يصلنا الطلب قبل انقضاء مدة صلاحية الكفالة البالغة (120) يوماً ويتعين إعادتها إلينا ، كما أنّ هذه الكفالة تحكمها القوانين المعمول بها في الأردن .

توقيع الكفيل/ البنك :

المفوض بالتوقيع :

التاريخ:

ج - 4 نموذج اتفاقية العقد agreement

صاحب العمل :

المقاول :

يرغب صاحب العمل في تنفيذ الأشغال المتعلقة بمشروع..... والمكون من:

.....

قبول (ACCEPTANCE) :

إنَّ صاحب العمل ، بمجرد توقيعه أدناه ، قد قبل بعرض المقاول ويوافق انه إزاء قيام المقاول بتنفيذ الأشغال وإصلاح أية عيوب فيها ، سيقوم بموافاته بالدفعات حسب أحكام العقد.

قيمة العقد:

مدة الإنجاز:

تعتبر هذه الاتفاقية نافذة بتاريخ تسلم المقاول للنسخة الأصلية الموقعة من قبل صاحب العمل.

توقيع صاحب العمل:

المفوض بالتوقيع عنه :

وظيفته :

التاريخ:

ج - 5 نموذج اتفاقية فضّ الخلافات Dispute Adjudication Agreement

وصف المشروع :

صاحب العمل : عنوانه:

المقاول : عنوانه:

عضو المجلس : عنوانه:

- لما قام صاحب العمل والمقاول بإبرام " اتفاقية العقد " وكونهما يرغبان مجتمعين بتعيين الحكم ويسمى أيضاً " المجلس " DAB " ، فإنّ كلاً من صاحب العمل والمقاول وعضو المجلس ، قد اتفقوا على ما يلي :-
- 1- تعتبر الشروط الملحقه بهذه الاتفاقية شروطاً لاتفاقية فضّ الخلافات ، مع إدخال التعديلات التالية عليها:
.....
 - 2- عملاً بأحكام المادة (17) من شروط اتفاقية فضّ الخلافات ، فإنه سوف يتم دفع بدل أتعاب الحكم على النحو التالي :-
 - بدل استبقاء (مبلغ شهري أو مقطوع) .
 - () دينار عن كل يوم كميّومات .
 - مضافاً إليها النفقات الأخرى .
 - 3- إزاء قيام صاحب العمل والمقاول بدفع بدلات الأتعاب والنفقات الأخرى بشروط اتفاقية فضّ الخلافات ، فإنّ الحكم يتعهد بأن يقوم بمهام " المجلس " كمسو للخلافات وفقاً لأحكام هذه الاتفاقية .
 - 4- يتعهد صاحب العمل والمقاول مجتمعين ومنفردين بأن يدفعا للحكم ، إزاء أدائه لمهام فضّ الخلافات بدل الاستبقاء والميآومات والنفقات الأخرى التي تتحقق له بموجب شروط اتفاقية فضّ الخلافات .
 - 5- إنّ هذه الاتفاقية خاضعة لأحكام القانون الأردني وتعتبر لغة الاتصالات بين الفريقين هي اللغة العربية .

صاحب العمل

المقاول

الحكم

وقد شهد على ذلك

قواعد اتفاقية فض الخلافات (القواعد)

- 1- في حالة نشوء خلاف يسمى (الحكم) خلال مدة لا تتجاوز (21) يوماً من تاريخ نشوء الخلاف ، باتفاق الفريقين على تسميته . وإذا لم يتم الاتفاق على ذلك فبإمكان أي فريق الطلب إلى سلطة التعيين المحددة في الملحق لتعيينه وعلى سلطة التعيين أن تقوم بتعيينه خلال مده لا تتجاوز (14) يوماً من تاريخ تقديم الطلب إليها ويعتبر هذا التعيين ملزماً للطرفين .
- 2- يمكن إنهاء تعيين الحكم بالاتفاق بين الفريقين ، وتنقضي مدة التعيين عند انتهاء فترة الصيانة أو إصدار قرار الحكم أو سحب الخلاف المحول للحكم أيهما يقع لاحقاً .
- 3- يتعين على الحكم أن يكون ويبقى خلال أداء مهمته محايداً ومستقلاً عن الفريقين ، ولا يجوز له تقديم النصح إلى أي فريق إلاّ باطلاع وموافقة الفريق الآخر ، وعليه أن يفصح فوراً وخطياً عن أي شئ أصبح على علم به مما قد يؤثر على حياديته أو استقلاليته .
- 4- يتعين على الحكم أن يتصرف بإنصاف وسوائية فيما بين الفريقين ، بإعطاء كل منهما فرصة معقولة لعرض قضيته وتقديم ردوده على ما يقدمه الفريق الآخر .
- 5- يتعين على الحكم أن يتعامل مع تفاصيل العقد ونشاطاته وجلسات الاستماع التي يعقدها بسرية تامة ، وأن لا يصرح عن أي من مضامينها إلاّ بموافقة الفريقين ، كما يجب عليه أن لا يوكل لأي طرف آخر القيام بمهمته أو أن يستقدم أية خبرة قانونية أو فنية إلاّ بموافقة الفريقين .
- 6- لا يعتبر الحكم في أي حال مسئولاً عن أي إدعاء بشأن فعل قام به أو أمر أغفله إلاّ إذا أمكن إثبات أنّ ما قام به ناتج عن سوء نية .
- 7- للحكم أن يقرر زيارة الموقع وأن يعقد جلسة استماع يدعى إليها الفريقان في الوقت والمكان اللذين يحددهما وله أن يطلب أية وثائق منهما ، وعلى الفريقين الاستجابة لطلب بهذا الخصوص .
- 8- يتعين على الحكم أن يتصرف كخبير غير متحيز (وليس كمحكم) ، ويكون متمتعاً بالصلاحيات الكاملة لعقد جلسات الاستماع كما يراه مناسباً دون التقيد بأية إجراءات أو قواعد باستثناء هذه القواعد ، ويتمتع في هذا السياق بالصلاحيات التالية :-
 - أ- أن يقرر مدى صلاحيته الذاتية ، وكذلك نطاق الخلافات المحالة إليه .
 - ب- أن يستعمل معرفته المتخصصة (إن توفرت) .
 - ج- أن يتبنى اعتماد أسلوب الاستجواب .
 - د- أن يقرر دفع نفقات التمويل التي تستحق بموجب أحكام العقد .

هـ- أن يراجع وينقح أي تعليمات أو تقديرات أو شهادات أو تقييم فيما يتعلق بموضوع الخلاف .
و- أن لا يسمح لأي شخص غير المقاول وممثله وصاحب العمل وممثله ، لحضور جلسات الاستماع ، وله أن يستمر في عقد جلسة الاستماع إذا تغيب أي فريق عن الحضور ، بعد التحقق من أنه تم إبلاغه بصورة صحيحة عن موعد الجلسة .

9- لا يجوز للحكم التنازل عن الاتفاقية للغير بدون الموافقة الخطية المسبقة من قبل الفريقين
10- يراعى أن لا يستدعى الحكم كشاهد لتقديم أي دليل بالنسبة لأي خلاف ناشئ عن العقد أو متصل به .
11- يحق للحكم أن يتوقف عن العمل إذا لم يتم الدفع له خلال المهلة المحددة ، شريطة أن يرسل إلى الفريقين إشعاراً بذلك مدته (28) يوماً .

12- إذا تخلف المقاول عن الدفع مقابل المطالبات التي تقدم إليه من الحكم ، يقوم صاحب العمل بالدفع إلى الحكم وله أن يسترد ما يترتب على المقاول من مبالغ إزاءها .

13- يمكن للحكم أن يستقل شريطة أن يعلم الفريقين بإشعاره مدته (21) يوماً . وفي حالة استقالته أو موته أو عجزه عن أداء مهامه أو إنهاء عقده أو رفضه الاستمرار في أداء مهامه بموجب هذه القواعد ، فإنه يتعين على الفريقين أن يقوموا بتعيين بديل له خلال (14) يوماً من تاريخ انقطاعه .

14- يتعين أن تكون لغة الاتصال بين الفريقين وكذلك الحكم والفريقين ، ولغة التداول في الجلسات ، باللغة المحددة في اتفاقية فض الخلافات وأن يتم إرسال نسخ عن أية مراسلات إلى الفريق الآخر .

15- يتعين على الحكم أن يصدر قراره خطياً إلى الفريقين بشأن أي خلاف يحال إليه وذلك خلال فترة لا تتعدى (21) يوماً من تاريخ إحالة الخلاف إليه أو من تاريخ سريان اتفاقية فض الخلافات ، إن كانت قد تمت بعد إحالة الخلاف إليه . يجب أن يكون القرار مسبباً ، وأن ينوه فيه بأنه يتم وفقاً لهذه القواعد .

16- إذا قام الحكم بنقض أي من أحكام البند رقم (3) آنفاً بعمله ، أو تصرف بسوء نية ، فإنه يعتبر غير مستحق لقبض بدل أتعابه أو نفقاته ، ويتعين عليه أن يرد تلك الرسوم والنفقات التي تم صرفها له ، إذا نتج عن ذلك النقض أن قراراته أو إجراءاته بشأن حل الخلافات أصبحت باطلة أو غير فاعلة .

17- تدفع أتعاب الحكم على النحو التالي :-

بدل الاستبقاء ك مبلغ شهري أو مقطوع .

المساومات عن كل يوم عمل في زيارة الموقع أو عقد جلسات الاستماع .

مشروع انشاء بوستر الطيبة- محافظة اريد

مضافاً إليها نفقات أداء المهام مثل المكالمات الهاتفية والفاكسات ومصاريف السفر والإعاشة .

يبقى بدل المياومات ثابتاً طيلة مدة أداء الحكم لمهامه .

يتعين على المقاول أن يدفع للحكم بدل أتعابه ونفقاته خلال (28) يوماً من تاريخ تسلمه للفواتير الخاصة بذلك

ويقوم صاحب العمل بدفع ما نسبته (50%) منها لاحقاً .

18- إذا نشأ أي خلاف يتعلق باتفاقية فض الخلافات ، أو بسبب نقضها أو إنهائها أو انعدام أثرها ، فإنه يتم

النظر في الخلاف وتسويته بموجب أحكام قانون التحكيم الأردني .

- تعديل المادة 3/15 من العقد بحيث يتم الغاء النص السابق واستبداله بمايلي:

إن أي خلاف صدر بشأنه إشعار بعدم الرضى، يجب الفصل فيه نهائياً من قبل محكم واحد بموجب قواعد التحكيم المحددة في

الملحق بعد أخذ موافقة صاحب العمل بإحالة النزاع الى التحكيم، وفي حالة عدم اتفاق الفريقين على تعيين المحكم، تقوم سلطة

التعيين المحددة في الملحق بتعيينه.

ج - 6 نموذج ضمان الأداء (كفالة التنفيذ) Performance Guarantee

إلى السادة:

..

يسرنا إعلامكم بأن مصرفنا :

قد كفل بكفالة مالية ، المقاول:.....

.....

بخصوص العطاء رقم ()

المتعلق بمشروع : بمبلغ : (.....) دينار أردني.....

..... وذلك لضمان تنفيذ العطاء المحال عليه حسب

الشروط الواردة في وثائق عقد المقاوله ، وأننا نتعهد بأن ندفع لكم . بمجرد ورود أول طلب خطي منكم المبلغ

المذكور أو أي جزء تطلبونه منه بدون أي تحفظ أو شرط. مع ذكر الأسباب الداعية لهذا الطلب بأنّ المقاول قد

رفض أو أخفق في تنفيذ أي من التزاماته بموجب العقد . وذلك بصرف النظر عن أي اعتراض أو مقاضاة من

جانب المقاول على إجراء الدفع .

وتبقى هذه الكفالة سارية المفعول من تاريخ إصدارها ولحين تسلم الأشغال المنجزة بموجب العقد المحدد مبدئياً

بتاريخ..... شهر..... من عام..... ما لم يتم تمديدها أو

تجديدها بناء" على طلب صاحب العمل .

توقيع الكفيل/ مصرف:.....

المفوض بالتوقيع :

التاريخ :

ج - 7 نموذج ضمان إصلاح العيوب (كفالة الصيانة) Defects Liability Guarantee

إلى السادة :.....
يسرنا إعلامكم بأنّ مصرفنا:
قد كفل بكفالة مالية ، المقاول:
.....

بخصوص العطاء رقم (.....)
المتعلق بمشروع :

بمبلغ : (.....) دينار أردني.....

وذلك ضماناً.....
لالتزام المقاول لتنفيذ جميع التزاماته فيما يخص أعمال الإصلاحات والصيانة بموجب أحكام عقد المقاوله الموجز.
وإننا نتعهد بأن ندفع لكم - بمجرد ورود أول طلب خطي منكم - المبلغ المذكور أو أي جزء تطلبونه منه بدون
أي تحفظ أو شرط / مع ذكر الأسباب الداعية لهذا الطلب بأن المقاول قد رفض أو أخفق في تنفيذ التزاماته فيما
يخص أعمال الإصلاحات والصيانة بموجب العقد ، وكذلك بصرف النظر عن أي اعتراض أو مقاضاة من جانب
المقاول على إجراء الدفع .

وتبقى هذه الكفالة سارية المفعول من تاريخ إصدارها ولحين التسلم النهائي للأشغال بموجب العقد وقيام المقاول
بإكمال النواقص والإصلاحات المطلوبة ما لم يتم تمديدها أو تجديدها بناء " على طلب صاحب العمل .
توقيع الكفيل/ مصرف:.....

المفوض بالتوقيع :

التاريخ :

ج - 8 نموذج إقرار بالمخالصة

Discharge Statement

أقر أنا الموقع إمضائي وخاتمي أدناه :

.....

.....

نقر نحن الموقعين إمضاءاتنا وخاتمنا في أدناه :

.....

.....

بأننا قبضنا من مبلغ (.....) ديناراً أردنياً .

وذلك قيمة الدفعة الختامية عن مشروع إنشاء :

موضوع العطاء رقم :

نصرح بموجب هذا الإقرار أننا قد قمنا بتقديم كافة مطالباتنا المتعلقة بالعقد وبهذا فإننا نبرئ

ذمة..... وحكومة المملكة الأردنية الهاشمية من أي حق أو

علاقة بالمشروع المبين أعلاه إبراء مطلقاً .

وعليه نوقع تحريراً في

اسم المتعهد :

اسم المفوض بالتوقيع:

توقيع المفوض بالتوقيع:

الخاتم:

ج - 9
نموذج إقرار بالمخالصة
Discharge Statement

أقر أنا الموقع إمضائي وخاتمي أدناه :

.....

نقر نحن الموقعين إمضاءاتنا وخاتمنا في أدناه :

.....

بأننا قبضنا من مبلغ (.....) ديناراً أردنياً .

وذلك قيمة الدفعة الختامية عن مشروع إنشاء :

.....

موضوع العطاء رقم :

نصرح بموجب هذا الإقرار أننا قد قمنا بتقديم كافة مطالباتنا المتعلقة بالعقد وبهذا فإننا نبرئ

ذمة وحكومة المملكة الأردنية الهاشمية من أي حق أو

علاقة بالمشروع المبين أعلاه إبراء مطلقاً .

وعليه نوقع تحريراً في

اسم المتعهد :

اسم المفوض بالتوقيع:

توقيع المفوض بالتوقيع:

الخاتم:

إقرار متعلق بالدفعات الأخرى

أقر أنا الموقع إمضائي وخاتمي في أدناه

نقر نحن الموقعين إمضاءاتنا وخاتمنا في أدناه.....

أنا قد اطلعنا على ما ورد في شروط العقد ونرفق فيما يلي إقراراً موقعاً من قبلنا حسب الأصول نقر فيه بجميع العمولات أو أتعاب الاستشارات أو أتعاب الوكلاء أو غيرها المباشرة وغير المباشرة وأي شيء ذو قيمة مادية والتي تم دفعها إلى شخص من " الآخرين" ونرفق طياً وصفاً مفصلاً لهذه الدفعات الأخرى ولمن دفعت وسببها سواء " تم دفعها أو كانت ستدفع بشكل مباشر أو غير مباشر من قبلنا أو نيابة" عنا أو من قبل مقاولينا من الباطن أو نيابة" عنهم أو أي موظفيهم أو وكلائهم أو ممثليهم ، وذلك فيما يتعلق بالدعوة إلى تقديم العروض الخاصة بتنفيذ هذا العقد أو عملية المناقصة / المزادة نفسها أو الإحالة على المقاول أو المفاوضات التي تجري لإبرام العقد أو من أجل تنفيذه فعلاً .

كما ونتعهد بأن نقدم تصريحاً خطياً إلى الفريق الأول على الفور عن وجود أي دفعات بما في ذلك على سبيل المثال وصفاً مفصلاً لسبب هذه الدفعات وذلك بتاريخ قيامنا بالدفع أو تاريخ إلزامنا بالدفع أو تاريخ إلزامنا بالدفع أيهما يحدث أولاً كما ونرافق على قيام الفريق الأول باتخاذ الإجراءات المبينة تحت المادة المشار إليها أعلاه حال حدوث أي مخالفة أو إخلال من قبلنا بأحكام العقد .

وعليه نوقع تحريراً في / /

اسم المتعهد:

اسم المفوض بالتوقيع:

توقيع المفوض بالتوقيع:

الخاتم :

* على المقاول تقديم الإقرار المتعلق بالدفعات الأخرى وفي حال عدم قيامه بدفع أي عمولات أو أتعاب عليه أن يذكر ذلك في الإقرار المقدم منه، وكل من لا يقدم هذا الإقرار سيرفض عرضه ، وعلى المقاول وضع الإقرار في ظرف مغلق منفصل عن العرض .

إقرار متعلق بالدفعات الممنوعة

أقر أنا الموقع إمضائي وخاتمي في أدناه

نقر نحن الموقعين إمضاءاتنا وخاتمنا في أدناه.....

أنا قد اطلعنا على ما ورد في شروط العقد ونرفق فيما يلي إقراراً موقعاً من قبلنا حسب الأصول ، نقر فيه بأننا لم نقم بدفع أي مبالغ سواء " كانت عمولات أو أتعاب استشارات أو أتعاب وكلاء أو غيرها سواء" بشكل مباشر أو غير مباشر ولم نقم بتقديم أي شيء ذو قيمة مادية ولم نقم بإعطاء وعود أو تعهدات لدفع مثل هذه المبالغ أو تقديم مثل هذه الأشياء سواء " مباشرة" أو بالواسطة ، أو بغض النظر عما إذا كان ذلك قد تم من قبلنا أو نيابة" عنا أو من مقاولينا من الباطن أو نيابة" عنهم أو أي من موظفيهم أو وكلائهم أو ممثليهم إلى الفريق الأول ، ويشمل ذلك على سبيل المثال لا الحصر أي " موظف " بغض النظر عما إذا كان يتصرف بصفة رسمية أم لا ، وذلك فيما يتعلق بالدعوة إلى تقديم العروض الخاصة بتنفيذ هذا العقد أو عملية المناقصة / المزادة نفسها أو الإحالة على المقاول أو المفاوضات التي تجري لإبرام العقد أو من أجل تنفيذه فعلاً .

كما ونتعهد بأن لا نقوم بتقديم أي دفعات ممنوعة أو نعد بتقديم مثل هذه الدفعات سواء " مباشرة" أو بالواسطة وسواء" أكان ذلك من قبلنا أو من قبل مقاولينا من الباطن أو أيّاً من موظفيهم أو وكلائهم أو ممثليهم إلى أي " موظف " فيما يتعلق بتعديل هذا العقد أو تجديده أو تمديده أو تنفيذه .

وعليه نوقع تحريراً في / /

اسم المتعهد:

اسم المفوض بالتوقيع:

توقيع المفوض بالتوقيع:

الخاتم :

* على المقاول تقديم الإقرار المتعلق بالدفعات الممنوعة وفي حال عدم قيامه بدفع أي عمولات أو أتعاب عليه أن يذكر ذلك في الإقرار المقدم منه، وكل من لا يقدم هذا الإقرار سيرفض عرضه ، وعلى المقاول وضع الإقرار في ظرف مغلق منفصل عن العرض .

اللجنة الدائمة للفيديك

- 1 عطوفة مدير عام دائرة العطاءات الحكومية/ رئيس اللجنة/ المهندس يحيى الكسبي
- 2 معالي المهندس داوود خلف
- 3 عميد كلية الهندسة من الجامعة الأردنية/ الدكتور ضيف الله الدلاييح
- 4 مساعد الأمين العام لشؤون الأبنية /وزارة الأشغال العامة والإسكان/ المهندس سناء الناظر
- 5 مساعد الأمين العام لشؤون الطرق وزارة الأشغال العامة والإسكان/ المهندس سامي هلسه
- 6 مدير المناقصات / دائرة العطاءات الحكومية / المهندس محمد الهزايمة
- 7 سعادة نقيب مقاولي الإنشاءات الأردنيين / المهندس سهل المجالي
- 8 سعادة نقيب المهندسين الأردنيين / المهندس وائل السقا
- 9 مندوب دائرة العطاءات الحكومية / مقرر اللجنة / المهندس ناديا الأحمد

الجزء الخامس

أ- المواصفات الفنية الخاصة و متطلبات صاحب العمل

1- متطلبات العمل :

ان الاعمال المشمولة ضمن هذا العطاء هي القيام بتنفيذ اعمال المشروع وكما هو مبين في جداول الكميات وحسب تعليمات المهندس المشرف وذلك بموجب:

1- دفتر عقد المقاولة الموجز 2007 (الجزء الاول والثاني)

2-الجزء الثالث : المواصفات الخاصة ومتطلبات صاحب العمل

3- الجزء الرابع : جداول الكميات.

4- المواصفات العامة : (وما طرأ عليها من تعديلات (ما لم يشار الى مواصفات اخرى) وتعتبر جزء لا يتجزأ من وثائق العطاء وتقرأ وتفسر على هذا الاعتبار).

أ- اعمال تمديد خطوط المياه وملحقاتها الصادرة عن سلطة المياه سنة 1992

ب- اسس ومعايير تطهير شبكات مياه الشرب والصادرة عن اللجنة العليا لنوعية المياه سنة 2004.

ج- المواصفات العامة للاعمال الانشائية والمعمارية الصادرة عن وزارة الاشغال العامة والاسكان لسنة 1996 وما طرأ عليها من تعديلات .

د- كودات البناء الاردنية للاعمال الكهربائية والميكانيكية.

5- اي مواصفات اخرى يشار اليها في وثائق العطاء .

6- المخططات.

7- تعليمات المهندس.

8- اية ملاحق تصدر على وثائق العطاء .

9- تنفذ جميع الاعمال الانشائية بموجب المواصفات الفنية العامة لاعمال انشاء المباني الصادرة عن وزارة الاشغال العامة والاسكان سنة 1985 وما طرأ عليها من تعديلات (ما لم يشار الى مواصفات اخرى) وتعتبر جزء لا يتجزأ من وثائق العطاء وتقرأ وتفسر على هذا الاعتبار .

10- جميع المواد المستعملة يجب ان تكون من اجود الاصناف كما وان المصنعية يجب ان تكون بموجب المواصفات وبمستوى ممتاز ووافق عليه المهندس المشرف.

2 - موقع العمل:

- محطة ضخ الطيبه-لواء الطيبه-محافظة اربد.

وصف الأعمال:

و - تتكون الاعمال المطلوبه ضمن وثائق العطاء مما يلي:

مشروع انشاء بوستر الطيبه- محافظة اريد

1-توريد وتركيب مجموعة تجهيزات البئر والربط على فوهة البئر،شاملا" اللحام والعزل والقص وتركيب وجميع الاعمال اللازمه
علماً أن الضغط الاسمي للمفاتيح والقطع 25بار .

2- توريد وتركيب وتشغيل خزان مياه معدني للمياه المنتجه عدد (1) سعة 25 م3 ، شاملا الربط مع فوهة البئر والمضخات شاملا
جميع المواسير والمحابس والقطع اللازمه ويكون الخزان بالمواصفات التالية:

- لا يزيد الطول عن 7م

- سماكة الصاج 6ملم

- قواعد للتثبيت من جسر U 8سم عدد 3 ارتفاع 50سم.

- سلم حديد مثبت من الداخل والخارج بطول تقريبي 6م.

- فتحة من الاعلى بقطر 50 سم مع باب متحرك مع فصالات

- هواية عدد (1) قطر 2"

- حمالات رفع عدد (2)

- لحام ماسوره قطر 4" بطول 30سم مع فلنجة من الجهه المقابلة لباب الخزان (دفع)

- لحام ماسوره قطر 4" بطول 30سم مع فلنجة من اسفل الخزان من نفس الجهه (سحب)

- لحام ماسوره قطر 4" مع فلنجة للغسيل

- الدهان من الخارج اساس احمر + دهان اخضر نهائي

- يكون الدهان مناسب لتخزين او احتواء الماء الصالح للشرب ومقاوم لجميع التفاعلات الكيماوية

- تنظيف السطح المراد دهانه بشكل جيد باستعمال المواد الكيماوية وضرب السطح المراد دهانه بالرمل للحصول على سطح نظيف.

- دهان الصهريج بطبقة لاتقل عن 200 ميكرون

- ارفاق شهاده من نوع الدهان بخصوص صلاحيته لمياه الشرب.

- الدهان من الداخل دهان ابوكسي مقاوم للمياه الكبريتية

-عمل قاعدة من جسر H 10سم طول (2×7)

- عمل رنج من جسر U 8سم على محيط الخزان عدد (3)

- توريد وتركيب مؤشر بلاستيكي شفاف قطر 1.5 " مع كرة بيل حمراء ومحبس معدني قطر 1.5 " .

- توريد وتركيب مواسير حديد قطر 4" بطول تقريبي 5 م.ط لخط الغسيل شاملا توريد وتركيب محبس قطر 4" ضغط 16 بار والاكواع

والتيات والفلنجات واللحام والعزل دنسوتيت وكل ما يلزم حسب المواصفات وموافقة المهندس المشرف .

3- توريد وصب خرسانه مسلحه (Ready Mix) بقوة كسر مكعب صغرى لا تقل عن 250كغم / سم2 بعد 28يوما لعمل قواعد

خرسانيه وجدران تعليه لتثبيت الخزان عليها قياس (2.4×1.5×0.4) م عدد (3) وارتفاع الجدران متغير بحيث يكون منسوب الخزانات

الجديده مطابقا لمنسوب الخزانات القائمه والسعر يشمل اعمال الطوبار (Fair Face) بجميع تشكيلاته شاملا الحفريات للقواعد بعمق

لايقل عن 1م والطعم واعادة الاوضاع والسعر يشمل ايضا توريد وتركيب حديد التسليح 5€12mm/m بالاتجاهين ويكون الحديد طبقتين

وعلى شكل كانات للقواعد والجدران حسب المواصفات والمخططات وتعليمات المهندس المشرف .

مشروع انشاء بوستر الطيبة- محافظة اريد

4- انشاء المظلة المعدنية قياس داخلي 4*6 م وذلك حسب المخططات المرفقه المعدة لذلك وحسب المواصفات الفنية الواردة في جدول الكميات وتعليمات المهندس المشرف.

- انشاء القواعد الظاهرة للمضخات السطحية عدد (2) من الخرسانة المسلحة حسب المواصفات المطلوبة و حسب المخططات في مواقعها وحسب تعليمات جهاز الاشراف

5- استلام من مستودعات حوفا وتركيب وتجربة وتشغيل وصيانة وحدات ضخ كهربائية أفقية عدد (2) مع اللوحات الكهربائية بموجب المواصفات ، شاملا عمل خطوط تصريف لمياه تبريد المضخات والسعر يشمل ايضا استلام وتركيب الكوابل الكهربائيه اللازمه لتشغيل المضخات شاملا الحفريات وتركيب الكوابل داخل sleeve من مواسير قطر 8" UPVC شاملا الطم وإعادة الوضع وجميع ام يلزم وجميع الاعمال التابعه وحسب الاصول. .

6- توريد وتركيب وعمل نظام تأريض ارضي للوحات الكهربائيه جميعها وللمضخات السطحية وكل ذلك حسب المواصفات الفنية وكما هو وارد في جداول الكميات وحسب تعليمات المهندس المشرف.

7- توريد وتركيب وتشغيل الانارة اللازمة للمظلة وللموقع وذلك حسب المواصفات وتعليمات المهندس المشرف.

8-توريد وتركيب وتشغيل وصيانة خطوط السحب من الخزان للمضخات وخطوط الدفع من المضخات مع الشبك على الخطوط القائمة وجميع خطوط السحب والدفع من Black Steel Pipes مع عمل Thrust Blocks اللازمة وكل ذلك حسب المواصفات الفنية وحسب تعليمات المهندس المشرف .

9-توريد وتركيب القطع اللازمة على خطوط السحب والدفع بموجب المخططات شاملا المفاتيح من المحابس والعدادات والردادات وساعات قياس الضغط والهوايات واية اعمال اخرى وكل ذلك حسب المواصفات الفنية وتعليمات المهندس المشرف .

10-توريد المواد وعمل الصيانه اللازمه لغرفة المشغل والوحده الصحيه القائمة حيث تتضمن اعمال الصيانه دهان وتركيب وحدات اضاءه وصيانة الابواب والشبابيك وصيانة الوحده الصحيه.

11- توريد وتركيب سياج معدني مكون من شريط شبكي مزئيق سماكة 2.9ملم وفتحة 5×5 سم بالارتفاع المبين على المخططات ويشمل السعر توريد وتركيب أعمدة من حديد (I Beam) قياس 100×50 ملم مثبتة عموديا" كل ثلاثة أمتار بدبش وخرسانة عادية (نسبة الخرسانة 70% و الدبش 30%) وبقوة كسر صغرى لا تقل عن 180 كغم/سم² بعد 28 يوما"حسب المخططات والمواصفات والسعر للمتر الطولي لكامل ارتفاع السياج يشمل الحفر وجميع المواد والأعمال بما في ذلك توريد وتركيب وشد ثلاثة أسلاك شائكة على الجزء العلوي المائل واثنان قطريان وكذلك تدعيم الزوايا باتجاهين ودهان الأعمدة بدهان مانع للصدأ ثلاثة وجوه والسعر يشمل توريد وصب وعمل زنار سفلي على طول السياج بعرض 20 سم وارتفاع 30 سم من الخرسانه بقوة كسر صغرى لا تقل عن 180 كغم/سم² بعد 28 يوما" شاملا الطوبار وجميع الأعمال اللازمه بموجب الشروط الخاصة والمخططات والمواصفات وحسب تعليمات المهندس المشرف .

12- ازالة البوابه القائمه وتسليمها لمستودعات حوفا وتوريد وتركيب بوابة للسياج (5م×2م) مكونة من ذرفتين مصنوعة من مواسير 2" جلفنايز وزن خفيف ومثبت عليها شريط شبكي مزئيق مماثل لشريط السياج من شبك قياسي 5×5 سم سماكة 2.9 ملم والسعر يشمل توريد وصب خرسانة مسلحة قوة تحمل 250كغم/سم² شاملا أعمال الحفريات والطوبار للقواعد والزنانيروالأعمدة الخرسانية المسلحة ويكون طوبار الأعمدة 40×40 سم بارتفاع 2.5 م من الواح فيرفيس أملس والسعر يشمل توريد وتركيب حديد التسليح للقواعد والاعمده والزنانير والسعر يشمل أيضا الحف والدهان وجهان تأسيس ووجهين زياتي والسعر يشمل أيضا تركيب الأيادي

مشروع انشاء بوستر الطيبة- محافظة اريد

والغال والمفصلات والدقورة والقفل وعمل زوايا رأسية وعلوية وجانبية وتثبيتها في الأعمدة للبوابة الرئيسية حسب المواصفات والمخططات وتعليمات المهندس المشرف .

13-توريد وفرش ودحل وكوي وعمل خطة إسفلتية سماكة 7 سم بعد الدحل حسب تجربة مارشل ، والسعر يشمل تسوية الساحة او الطريق حسب المناسيب المطلوبه ومهما كانت السماكه وذلك بالحفر في أي نوع من انواع التربة والصخر ...الخ ، والسعر يشمل التصرف بناتج الحفريات للطعم ضمن الموقع وفي حالة عدم صلاحية أو كفاية ناتج الحفريات يتم الطعم من مواد مختاره وتذك وترص جيدا" بواسطة المداحل مع الرش بالماء والدحل لدرجة رك 95% حسب تجربة البروكتور المعدل ، ويشمل السعر توريد وخلط وفرش طبقة أساس من البيس كورس (B.C) سماكة 20 سم بعد الدحل مع الرش بالماء ويخلط ويدحل جيدا" بمدحلة إرتجاجية للحصول على درجة دك لا تقل عن 100% حسب تجربة البروكتور المعدل والفرد يجب أن يكون بواسطة الجريدر مع مراعاة الميول لتصريف مياه الأمطار، ويشمل السعر توريد ورش الوجه التأسيسي (M.C-70) بمعدل 1.5 كغم /م² مع عمل التجربة ويجب الرش بالرشاش الميكانيكي شاملا جميع الفحوصات اللازمة وحسب المواصفات وتعليمات المهندس المشرف .

ز- على المقاول التقيد والالتزام بما يلي :

- 1- يحق لصاحب العمل زيادة او تقليل الكميات في اي بند بدون دفع اي علاوات اضافية للمقاول.
- 2 - يحق لصاحب العمل عدم تنفيذ اي بند من بنود العطاء (او فروع البند) ويحق له زيادة اي كمية بنسب غير محدهه عما هو وارد في جدول الكميات ولايحق للمقاول المطالبة بأي تعويض وتعتبر الشروط العامة والخاصة لاغيه بهذا الخصوص .
- 3- الاسعار الوارده بجداول الكميات هي اسعار ثابتة.

ثانيا - اعمال الخرسانه والحفريات:

- 1 - يجب استعمال الرجاج الميكانيكي عند صب جميع انواع الخرسانه العاديه او المسلحه للحصول على خرسانه خاليه من الفجوات او التعشيش ويجري تعيين نوعية الرجاجات ومدة الرج من قبل المهندس، وفي جميع الاحوال يجب ان تكون الرجاجات من النوع الذي يعطي ما لا يقل عن (5000) رجه في الدقيقه ويستعمل الرجاج بموجب المواصفات وعلى المقاول ان يزود موقع العمل قبل البدء بالصب برجاجين صالحين للعمل، واحد للاستعمال والثاني احتياط.
- 2- يجب ان تحفظ الخرسانه رطبه لمدة لا تقل عن (7 ايام) ويتم ايناع وترطيب الخرسانه بموجب المواصفات.
- 3- يحظر المباشره بصب الخرسانه قبل الحصول على موافقة المهندس الخطيه وعلى المقاول تقديم طلب خطي لاختذ الموافقه على الصب قبل فترة لا تقل عن 24 ساعه.
- 4- على المقاول تنفيذ ما تنص عليه المواصفات الفنيه العامه بخصوص الخرسانه في الاجواء الحاره والبارده وحسب تعليمات وموافقة المهندس.
- 5- لغاية ضبط جودة المواد والخلطات الخرسانيه، على المقاول اجراء الفحوصات المخبريه اللازمه للمواد وفقا لما ورد في المواصفات الفنيه العامه وعلى ان يقوم بفحص الخلطات الخرسانيه بشكل دوري كما يلي:
 - لكل 50م³ خرسانه تؤخذ على الاقل 6 مكعبات ممثله بحيث تفحص 3 بعد اسبوع والثلاثه الباقيه بعد 28 يوما.
 - لكل يوم صب اذا كان الصب على مراحل ، تؤخذ 6 مكعبات تفحص 3 بعد اسبوع والثلاثه الباقيه بعد 28 يوما.

مشروع انشاء بوستر الطيبه- محافظة اربد

- 6 - على المقاول تقديم الجداول الخاصه بتنفيذ مخططات حديد التسليح (Bar-Schedule Binding) مبينا فيها اطوال واوزان حديد التسليح لممثل المهندس بغرض اعتمادها قبل التنفيذ.
- 7 - الخرسانة المسلحة المستعملة في كافة أعمال العطاء تكون بقوة كسر مكعبي صغرى لا تقل عن 250 كغم/سم² بعد 28 يوماً (ما لم يذكر خلاف ذلك).
- 8 - الخرسانة العادية المستعملة في كافة أعمال العطاء تكون بقوة كسر مكعبي صغرى لا تقل عن 200 كغم / سم² بعد 28 يوماً (ما لم يذكر خلاف ذلك).
- 9- اذا استدعت طبيعة التربة بعد التحقق من قدرة تحملها اجراء تعديل على مناسيب الحفريات او ابعادها بزيادة العمق او العرض او كليهما فعلى المقاول تنفيذ هذه الاعمال ولا يحق له الاعتراض او طلب زياده في الاسعار .
- 10- تكال أعمال الحفريات بالمتر المكعب كيلاً" هندسياً صافياً حسب الابعاد والاقيسة المبينة على المخططات أو التي يأمر بها المهندس ولا يدفع للمقاول علاوة الحفريات مسافات العمل (Working Space) وتعتبر تكاليفها مشمولة ضمن الاسعار الافرادية لاعمال حفريات الاساسات ما لم يذكر خلاف ذلك.
- 11- اعمال الطمم: في حالة عدم صلاحية أو كفاية ناتج الحفريات على المقاول توريد طمم من خارج الموقع من مواد مختاره يوافق عليها المهندس، ويتم الطمم على طبقات لا تزيد سماكة كل طبقه عن 20سم مع الرش بالماء والدحل بالاجهزه الميكانيكيه لكل طبقة حتى الوصول للمنسوب اللازم.
- تكون المواد المختاره المستعمله للطمم من مواد مناسبه وموافق عليها خاليه من الفضلات والشوائب ومتدرجه للحصول على درجة الدك المطلوبه وان لا تحتوي على الحجاره او قطع الخرسانه التي يزيد حجمها عن (50مم) في أي اتجاه ويكون محتوى اللدونه (Plasticity Index) اقل من (10) طبقاً للمواصفات البريطانيه رقم (1377) وتكون الكثافه الجافه القصوى لها اكثر من (1.6غم/سم³) حسب فحص بروكتر القياسي للكثافه .
- تعتبر تكاليف أعمال توريد مواد الطمم وعملية الطمم مشمولة ضمن أسعار الحفريات ما لم يذكر خلاف ذلك.

4 - التنسيق:

على المقاول مسؤوليه التنسيق المسبق مع وزارة الاشغال العامة والاسكان والبلديه المعنيه وادارة المرور وشركة الاتصالات وشركة الكهرباء واية جهه رسميه اخرى وتقديم جميع متطلبات الجهات المعنيه للحصول على موافقاتها للعمل في او تحت او قرب الطرق العامه والارصفه وعلى المقاول ان يتقيد بتعليمات ومتطلبات هذه الجهات بما فيها اشارات المرور والاشارات التحذيريه او التحويلات والحواجز وحماية المشاه والاملاك الخاصه ... الخ وجميع المتطلبات ولا يدفع للمقاول لقاء هذه الاعمال اية علاوات اذ تعتبر مشموله ضمن الاسعار الافراديه للاعمال المطلوبه.

5 - العمل في الليل :

يجق لصاحب العمل او المهندس او ممثل المهندس او اية سلطه اخرى بموافقة المهندس اصدار التعليمات للمقاول لتنفيذ أي جزء من الاعمال في ساعات الليل وذلك في الحالات التي تتطلب ذلك وعلى المقاول الالتزام بهذه التعليمات وتنفيذ الاعمال وبدون اية علاوات اضافيه لقاء ذلك .

6 - الاعمال ضمن الاملاك الخاصه والتبليغ:

مشروع انشاء بوستر الطيبة- محافظة اريد

حيثما يكون تنفيذ العمل في الاراضي الخاصه فإن صاحب العمل يكون مسؤولاً عن مفاوضة اصحاب هذه الاراضي او شاغليها والحصول على حقوق مرور في هذه الاراضي وتكون مسؤولية المقاول العمل بالسرعه المتفق عليها مع صاحب العمل والمهندس واعلامهم عن عزمه دخول هذه الممتلكات الخاصه وسرعة عمله فيها كما هو وارد في شروط العطاء، وقبل المباشرة في اعمال الحفريات في الاملاك الخاصه يتوجب على المقاول ان يتفق ويسجل مع صاحب هذه الاملاك او شاغليها على حالة سطوح هذه الاملاك مع اشاره خاصه الى اية ظواهر تتطلب عنايه خاصه واعادة الاوضاع وتعمل هذه السجلات بمساعدة المهندس الذي يحتفظ بنسخه من هذه الاتفاقيات والسجلات، ولايحق للمقاول المطالبه باية اجور عن اية اعمال اضافيه او تاخير او توقف ينشأ عن ذلك حيث تعتبر التكاليف مشموله ضمن اسعار العطاء .

7 - المرافق المدفونه تحت الارض :

على المقاول ان يُراعي البنود في المواصفات العامه والتي تتعلق بمسؤوليته لتحديد الاماكن والمحافظة على المرافق المدفونه تحت الارض والمنشآت وعليه الحصول على المعلومات التامه عن مواقع هذه المرافق من الجهات المختصة، ويقوم المقاول بتحديد اماكنها مسبقاً عن طريق عمل حفر تفتيشيه وعلى نفقته الخاصه وأية اضرار تتسبب لهذه المرافق والمنشآت، على المقاول القيام باصلاحها على نفقته الخاصه طبقاً للبنود ذات العلاقه في العقد وحسب تعليمات المهندس.

8 - مستخدموا المقاول :

على المقاول ان يحتفظ بتجهيزات انشائيه مناسبه واليات وعدد ... الخ بالعدد الكافي وجهاز منفذ يتكون من مدير مشروع ومهندسي موقع ومساحين ومراقبين وعمال مهرة وعمال عاديين مما يمكنه من العمل في مواقع متعدده في ان واحد بغض النظر عن حجم العمل ومواقع وحسب البرنامج الموافق عليه وان يتم تسليم الاعمال المحاله اليه طبقاً للمواصفات وموافقة المهندس ضمن مدة العطاء .

9 - المياه الاعمال :

1 - يكون المقاول مسؤولاً عن تامين جميع احتياجاته من المياه في موقع العمل لاستعمال عماله ومستخدميه ومستخدمي صاحب العمل والمهندس (لتنفيذ الاعمال المشموله بهذا العقد بما في ذلك فحص الضغط والتعقيم والغسيل) وتخزينها في اوعيه نظيفه (يوافق عليها المهندس) بالكميات الكافيه لتضمن سير العمل وعلى نفقته الخاصه.

2- في حال توفر مصدر للمياه تابع للسلطه في موقع العمل اوقريب منه فيمكن للمقاول (بعد موافقة صاحب العمل) الحصول على احتياجاته من المياه مقابل التسعيره الرسميه المعتمده على ان يقوم المقاول (وعلى نفقته الخاصه) بنقل المياه بواسطة الصهاريج او توفير المواسير والقطع والمفاتيح وعمل التمديدات اللازمه لايصال المياه الى موقع العمل وتركيب عداد مياه يوافق عليه المهندس وادارة المياه المعنيه وازالة هذه التمديدات والعداد عند انتهاء العمل في هذا العقد، وعليه ان يقوم بتشغيل وصيانة اماكن التخزين والمواسير والتوصيلات والمضخات والصهاريج المتحركه وكافة الاعمال المؤقته لنقل المياه من نقطه التوريد الى المكان الذي يكون بحاجه اليه .

10 - استعمال اجزاء من المشروع عند الانتهاء :

مشروع انشاء بوستر الطيبة- محافظة اريد

لصاحب العمل الحق (اذا رغب في ذلك) في استعمال او تشغيل أي جزء او اجزاء من المشروع مباشرة حين الانتهاء من تنفيذها ولا يعفي ذلك المقاول من مسؤولياته تجاه الصيانه ول اعطيه الحق لاية دفعات اضافيه بسبب ضياع الوقت او عدم ملائمة العمل التي يمكن ان يتعرض لها نتيجة لهذا العمل من قبل صاحب العمل .

11 - كميات المواسير والمفاتيح والقطع الخاصه :

قبل طلب المواسير على المقاول ان يعمل مسحا لخطوط المواسير والتأكد من الأطوال المطلوبه من كل نوع من المواسير والقطع الملائمه والمفاتيح والقطع الخاصه اللازمه لاتمام الاعمال .

واية كميات من المواسير والقطع تزيد عن الكميات المطلوبه للاستعمال يتحملها المقاول، اما اذا رغب صاحب العمل ان ياخذ الكميات الزائده من المواسير والقطع لاستعمالها مستقبلا فيدفع للمقاول ثمنها كاملا زائداً (15 %) ويكون توريد هذه القطع في هذه الحالة في مستودعات صاحب العمل حسب تعليمات المهندس .

12 - مختبر فحص المواد :

على المقاول تسمية مختبر لفحص المواد مؤهل ومعتمد لدى الجهات المختصة وموافق عليه من قبل سلطة المياه وذلك لإجراء وعمل الفحوصات المطلوبه بأنواعها المختلفة حسب شروط ومواصفات العطاء وكذلك الفحوصات التي يطالبها المهندس .
-على المقاول إرسال وإحضار العينات إلى ومن المختبر (أو إحضار جهاز المختبر إلى موقع العمل وذلك حسب طبيعة ونوع الفحص) وإحضار التقارير (بواقع 3 نسخ من كل تقرير) وجميع ما يلزم لتنفيذ هذه الأعمال.
-تعتبر تكاليف إجراء الفحوصات أو إعادة إجراؤها وتكاليف أعمال المختبر وتحضير التقارير مشمولة ضمن أسعار العطاء
-لا يجوز المباشرة بتنفيذ أو بتصنيع أو توريد أية مواد ما لم يقدم المقاول المخططات التنفيذية لها والحصول على موافقة المهندس عليها مسبقاً.

13 - لوحة تسمية المشروع (Sign Board)

على المقاول وخلال اسبوع من تاريخ استلام موقع العمل، تجهيز وعمل وتقديم لوحة تسمية المشروع (واحدة على الاقل) قياس (2.00×1.00مترعلى الاقل) مثبتة في مكان واضح من موقع المشروع وحسب تعليمات المهندس ومبيناً عليها بوضوح ما يلي:

- 1 - اسم المشروع ورقم العطاء .
- 2 - اسم المالك (سلطة المياه) .
- 3 - اسم الجهة المشرفه على المشروع .
- 4 - اسم المقاول وعنوانه .
- 5 - تاريخ بدء العمل ومدة العطاء .

تتكون اللوحه من اطار متين من حديد الزاوية قياس 50×50×5مم مع التقويه القطريه، والوجه من صاج مجلفن سماكة 2مم، تثبت اللوحه على ماسوريتين قطر 2" مثبتتين في الارض داخل قاعدتين خرسانيتين بقياس مناسب .
تدهن كامل اللوحه مع الاطار والتقويات والوجه بدهان اساس خاص بالحديد المجلفن .
يكون لون الدهان النهائي للوجه ونوعيه وحجم الخط حسب تعليمات وموافقة المهندس .

مشروع انشاء بوستر الطيبة- محافظة اريد

تعتبر تكاليف تجهيز وتوريد وتركيب اللوحه وازالتها عند الانتهاء من المشروع، مشموله ضمن اسعار العطاء .

14 - مخططات العقد :

مخططات العقد هي المخططات التي تم تحضيرها لهذا العقد والمرفقه مع وثائق العطاء، وايه مخططات معدله او تفصيليه او ملحقه يمكن ان يصدرها المهندس اثناء سير العمل في اعمال العطاء وكذلك المخططات التفصيليه والتنفيذيه المقدمه من المقاول والموافق عليها خطيا من قبل المهندس .

- المخططات التنفيذيه (Shop Drawings) :

- على المقاول عمل المساحة لمسارات خطوط المياه ورسم وتجهيز مخططات تنفيذيه تفصيليه لاعمال تمديد خطوط الصرف الصحي والمياه.

- عند انتهاء تمديد أي خط يقوم المقاول بعمل المساحة اللازمة لعمل المخططات المرجعية للأعمال كما نفذت AS built drawing شاملاً المسقط الأفقي والبروفايل (Profile) ويقدم المقاول النسخ الأصلية (الشفافة) وثلاثة نسخ مطبوعة من هذه

المخططات للمهندس للموافقة عليها قبل أن تعتبر هذه الأعمال منتهية وقبل تسليمها للسلطة -تكون هذه المخططات مفصلة ومرسومة بنفس مواصفات ومقاييس ومخططات السلطة تكون مادة المخططات المرجعية الأصلية من ورق جيلاتين شفاف نوع :-

Pure White Permaterace Gelatin Transparent Unterable Film.

سماكة 0.07 ملم وتكون مقاييس الورق(62X84)سم للمساقط الأفقية والطولية وتعتبر تكلفة الأعمال المساحية وتحضير هذه المخططات مشموله في أسعار العطاء .

- لا يجوز المباشرة بتصنيع او توريد اي مواد ما لم يقدم المقاول المخططات التنفيذيه (ما لم يطلب المهندس غير ذلك) لها والحصول على موافقة المهندس عليها .

- يقدم المقاول الى المهندس (3) ثلاثة نسخ بالاضافه للنسخه الاصليه موقعه من المقاول بموجب كتاب خطي بذلك و تسلم للمهندس في موقع العمل او حسب طلب المهندس .

- على المقاول ان يقوم بتصحيح اية ملاحظات او تعديلات يطلبها المهندس .

- ان موافقة المهندس على هذه المخططات او المواد او الاجهزه والمواصفات لا تعفي المقاول من مسؤوليه التوريد والتصنيع بالمقاسات الصحيحه وحسب المواصفات ومتطلبات العقد .

- تعتبر تكاليف اعداد المخططات التنفيذيه وتجهيزها وتقديمها مشموله ضمن اسعار العطاء .

- المخططات المرجعيه (Record Drawings)

- على المقاول وعند استكمال اعمال المشروع وقبل صرف الفاتوره النهائيه ان يقوم بعمل المساحة اللازمه لخطوط المياه التي تم

تنفيذها لعمل المخططات المرجعية للاعمال كما نفذت (As Built Drawings) شاملا المسقط الافقي والمقطع الطولي (

Plan & Profile) وتبين هذه المخططات وبشكل واضح الاسم الرسمي للشوارع التي تم العمل خلالها وكذلك اشارات

لمواقع أي مرافق مدفونه ظهرت اثناء تنفيذ الاعمال، وتبين هذه المخططات وبشكل واضح تفاصيل واقيسة ومواصفات المواد المستعمله في اعمال المشروع كما نفذت.

مشروع انشاء بوستر الطيبة- محافظة اريد

- وعلى المقاول ربط كافة خطوط المياه وتوابعها (كالمفاتيح) المبينة على المخططات المرجعية بأقيسة من نقاط ومعالم ثابتة في موقع العمل وحسب تعليمات المهندس المشرف لسهولة الوصول اليها عند اعمال الصيانة .
- على المقاول تقديم النسخ الاصلية (الشفافة) و (3) ثلاثة نسخ مطبوعه من هذه المخططات الى المهندس للموافقه عليها قبل ان تعتبر هذه الاعمال منتهية وقبل تسليمها للسلطه، وعلى المقاول تعديل وتصليح اية ملاحظات يطلبها المهندس. وبعد موافقة المهندس على هذه المخططات، على المقاول تجهيز وتقديم المخططات المرجعية مرسومة كالتالي:
- 1- المخططات الأفقية للشبكات (Plans) يتم رسمها باستخدام نظام المعلومات الجغرافية (GIS) ذات دقة عالية وبمواصفات تتطابق مع متطلبات أنظمة المعلومات الجغرافية المعتمدة في سلطة المياه في المركز وفي المحافظات، حسبما ورد في الملحق (رقم 1) المرفق بالجزء الثالث من وثائق العطاء، علماً بأن عملية التدقيق على مطابقة هذه المخططات للمواصفة سيتم من قبل المختصين بأنظمة المعلومات الجغرافية في وحدة التخطيط والإدارة وسلطة المياه.
- 2- باقي المخططات والرسومات المرجعية (إنشائية، كهربائية، ميكانيكية، مقاطع طولية وعرضية ... الخ فيتم إنتاجها باستخدام نظام ال (Autocad).
- على المقاول تقديم (4) أربعة نسخ الكترونية (CD's) من كامل هذه المخططات.
- تكون نوعية ورق المخططات المرجعية الاصلية من ورق جيلاتين شفاف قياس 62×84سم :
- (Pure White Permatrace Gelatin Transparent Unterable Film, 0.07 mm thick) .
- تعتبر تكاليف الاعمال المساحية وتحضير وتجهيز وتسليم هذه المخططات والنسخ الألكترونية مشموله ضمن اسعار العطاء.

15 - وثائق العطاء : تعتبر وثائق العطاء مكمله لبعضها البعض و تقرأ و تفسر على الاعتبار .

- تتكون وثائق العطاء الخاصه بهذا العقد مما يلي :
- دعوة العطاء بما فيها الإعلان .
- الجزء الاول : الشروط العامة لعقد المقاولة الموجز لعام 2007.
- الجزء الثاني لعقد المقاولة الموجز لعام 2007 ويتضمن :
- أ - التعليمات للمناقصين .
- ب - الشروط الخاصة .
- ج - نماذج العرض والضمانات والإنتفاقيات والبيانات
- د - الشروط الخاصة الإضافية
- الجزء الثالث :
- أ - المواصفات الفنية الخاصة و متطلبات صاحب العمل .
- ب - المواصفات الفنية العامة.
- الجزء الرابع : جداول الكميات
- الجزء الخامس : المخططات .

16- اولويات وثائق العطاء :

تحذف الأولويات الواردة في الشروط العامه للعقد (الجزء الأول) وتستبدل بالاولويات حسب التسلسل التالي :

- 1 - اتفاقية العقد (اذا اكملت) .
 - 2 - كتاب القبول (قرار الاحالة) .
 - 3 - العطاء (عرض المناقصة) .
 - 4 - اية ملاحق على وثائق العطاء .
 - 5- دفتر عرض المقاوله الموجز لعام 2007 - الجزء الثاني
 - 6- دفتر عرض المقاوله الموجز لعام 2007 - الجزء الاول.
 - 7- الجزء الثالث أ. المواصفات الفنية الخاصة ومتطلبات صاحب العمل
 - 8- الجزء الرابع جداول الكميات
 - 9- الجزء الثالث ب. المواصفات الخاصة
 - 10- الجزء الخامس المخططات
- أما إذا تبين أن هنالك غموضاً في وثائق العطاء أو تبايناً فيما بينها ، فإنه يتعين على المهندس إصدار التعليمات أو الإيضاح اللازم بخصوص ذلك .

17- الصور الفوتوغرافية :

على المقاول مسؤولية تصوير مراحل تنفيذ المشروع أثناء تقدم سير العمل حسب توجيهات المهندس وكما هو مبين فيما يلي:

- يتم أخذ صور فوتوغرافية للموقع الكلي العام للمشروع أو لمظاهر خاصة في الموقع (أو مواقع العمل) وكذلك لكل مساحة مخصصة للإنشاء وتقديم هذه الصور للمهندس في اسرع وقت .

ويتم إعادة تصوير هذه المناظر نفسها بعد إنهاء جميع نشاطات المشروع ، وتقدم هذه الصور مع مطالبة المقاول النهائية

- يعمل كل شهر مجموعة إضافية من الصور خلال تقدم سير العمل على فترات زمنية يحددها المهندس ، وتقدم هذه الصور مع كل مطالبة على الحساب للمقاول .

- تكون الصور وآلة التصوير من النوع الملون ومن نوعية عالية الجودة، ويتم تقديم جميع النسخ السالبة (Negatives) وصورة عدد (2) إثنان (قياس 100 × 125 مم) من كل منظر تم تصويره .

- يتم تقديم جميع النسخ السالبة (Negatives) بشكل منفصل ومحدد عليها وصف المنظر والتاريخ ، ويتم تقديم الصور

المطبوعة ضمن مغلفات بلاستيكية (البومات) يوافق عليها المهندس ويتضمن كل منظر لوحة تشير إلى اسم ورقم العطاء واسم المقاول ووصف وموقع المنظر في الصورة وتاريخ أخذ الصورة .

- تعتبر تكاليف أخذ الصور وتقديمها كما هو مبين على حساب المقاول وتكون مشمولة ضمن الأسعار الإفرادية لبنود العطاء .

-على المقاول مراعاة انه و اشاره لكتاب دولة رئيس الوزراء رقم (17497/1/3/57) تاريخ 2010/9/23 (مرفق نسخة منه في وثائق

العطاء) فقد تم استثناء مشاريع سلطة المياه من بلاغ دولة رئيس الوزراء رقم (19) لسنة 1999 بخصوص تمديد مدة العطاءات

لأسباب الظروف الجوية او نقص المواد او نقص العمالة .

SPECIFICATIONS OF MATERIALS VALVES, PIPES AND FITTINGS

1. General :

1. Supply and Quality of Materials :

All materials shall comply with those Standards and Specifications laid down by internationally recognized institutions, for the water industrial. Preference will be given to manufacturers that are quality certified to ISO. 9001.

All materials supplied to the site in Jordan shall be subject to acceptance tests carried out by the Royal Scientific Society and if any tests not available in RSS the third party shall be subject to the Engineer's approval.

All materials supplied shall be subject to the Engineer's approval.

Any or all materials and manufactured articles supplied by the Contractor for use in the works, shall if so required by the Engineer be tested in advance at the Contractor's expense, in accordance with the required specs.

Inspection or approval by the Engineer of any equipment or materials shall not release the Contractor from any of his obligations under this Contract .

All information and specifications relating to Products and materials proposed for this Contract, must accompany each Tender Submission.

2. Storage of Materials :

The Contractor shall be responsible for the storage and well being of all materials purchased under this Contract, and any discrepancies found therein.

The Contractor shall manage and maintain stock - yards that can accommodate all materials purchased and approved by the Engineer under this Contract, stored either in the open or under cover as required by the Manufacture's / contractor's instructions , and shall be regularly inspected by the Engineer's staff and maintained to the Engineer's satisfaction.

3. Scope :

The Contractor shall furnish and deliver to the site, all kind of pipes, valves, fittings, closure pieces, flanges, bolts, nuts gaskets, jointing materials ...etc. and appurtenances as specified and required.

All valves shall be flanged. Pipe fittings and valves shall be Suitable for buried installation.

All tapers (reducers) required at tees and other locations to meet the specified diameters may be furnished in the manufacturer's standard lengths and diameters.

4. References :

Reference to any national standard or publication (as ISO, BS, DIN. etc.) in these specifications is intended to indicate general configuration, type and quality. Goods may be furnished which meet

مشروع انشاء بوستر الطيبه- محافظة اريد

other internationally accepted standard, provided that overall quality will be at least equal to that required by the standard specified. Supporting documents / certificates shall be submitted hereto.

5. Potable Water Certification :

All pipe and coating materials shall be certified for potable water use and shall contain no ingredients that may migrate into water in amounts that are considered to be toxic or otherwise dangerous for health. All pipes shall be certified as safe for transporting potable water by an independent testing laboratory.

6. Materials and Standards :

All materials shall be complying with ISO, BS, API & DIN. standard and shall be supplied from approved manufactures and country of origin.

The Contractor is requested to submit a list of contractors that he intends to use together with his Tender bid.

The Contractor shall also submit for the approval of the Engineer, before ordering:

- a) Type of materials to be used, dimensions, thickness, lengths, shape, weight, class, tolerance limits and quality.
- b) Standard to which the item is manufactured.
- c) Details of specials, adapters, fittings and joint design.
- d) Coating and lining methods.

7. Fittings :

Fittings unless otherwise specified shall be furnished with a type of joint compatible with the pipe system at the contractor's option. Any adaptors necessary to joint fittings to the adjacent pipes, even of different materials, shall be provided by the Contractor at no extra cost.

8. Toxic Materials :

The Contractor is prohibited to import or to use any of the "Acrylamide and N-Methylolacrylamide Grouts" or any other toxic or poisonous materials or submaterials used in piping, it's accessories, lining, coating, sealing ...etc, or in various kinds of concrete or in soil in any kind of usage. Any import or usage of the above mentioned materials by the Contractor, requires to be licensed in writing by the Employer, otherwise, the Contractor shall be subject to legal pursuance.

9. Submittals :

The Contractor shall submit :

- i – Detailed manufacturer's proposals for pipes and fittings manufacture, coating & lining ... etc.
- ii – Certified copies of manufacturers quality control test results and reports .
- iii –(certificate of conformity according to IAF Requirements)for pipes, Valves, fittings and other components .

“ This is to certify that the pipes and specials delivered in this consignment comply with the required specification .

No payment shall be made in respect of any consignment of pipes and specials in case it is not accompanied by above mentioned certificates .

10. Payment of Taxes and Duties :

The contractor shall take in his consideration that all materials in this Contract shall not exempted from customs duties, import duties, sale taxes and all other kinds of duties and taxes.

11. Tests After Delivery :

The Employer & the Engineer have the right to take samples of the supplied materials, and the following tests shall be carried out in accordance with the relevant ISO, BS, DIN or regulations by an approved laboratory.

1. Hydrostatic pressure test .
2. Hardness test .
3. Tensile strength test .
4. Elongation test .
- S. Measurements and weight .
6. Test of cement mortar lining .

All tests as mentioned or directed by the Engineer shall be borne by the Contractor and the costs shall be included in the Contract unit rates.

12. Third Party Control :

The Contractor shall at his own expense provide a recognized independent third party control to monitor quality and witness testing during **all manufacturing process** and to ensure that the products used in the works (such as pipes , fittings , valves . various electrical and mechanical apertures , lap equipment ... etc.) are all manufactured in accordance with the specific standards in this Contract (or any other specifications approved by the Employer) .

The third party control should also issue test certificates stating that they had witnessed all the tests performed on all products , and all materials are conforming to Specifications and they had checked and inspected all materials regarding the proper packing and shipment , and certifying the bill of lading .

Before signing the Contract , the Contractor shall inform the Employer of the name of the control party he intends to engage , and obtain the Employer's approval.

The third party control should be selected from the following list which issued by the Central Tenders Directorate :

- 1) Bureau Veritas - Messers. Red Sea Shipping Agency W .L .L
SGS – Societe General De Servwillance.
- 2) Tuboscope Verco International.
- 3) OMIC – Overseas Merchandise Inspection Company LTD.
- 4) Baltic Control LYTD.
- 5) Inspecturate (suisse) S. A.
- 6) Control Union International.

2 Valves

i. GENERAL :

Materials used in valves shall be suitable for potable water.

All valves, on any type of pipeline must be jointed to the pipe by flanges (unless otherwise specified) and shall have a testing pressure of 1.5 times the nominal pressure.

All valves shall be of the non-rising stem type, and shall be capable with standing the specified test pressure without leaking.

The hand wheels of all valves (including those which incorporate gear)shall be arranged for clockwise closing. All hand wheels shall have, in their periphery, the words OPEN and SHUT and appropriately positioned arrows.

When valves have inaccessible positions, extension spindles shall be fitted to suit the situation.

The contractor shall submit a certificate from the manufacturer certifying that all valves have been mill tested and that they have successfully passed the tests prescribed by the relative standard specifications.

ii. Gate Valves :

GENERAL:

1. They shall comply with EN 1171 standard latest revision. For drinking water, valves from DN 50 to 2000mm, PN (16 , 25, 40) bars, shall also comply with EN 1074-2 standard latest revision.
2. All accessories and fittings (gasket, hand wheel GG25 or carbon steel, bolt and nut of A2, flanges EN 1092-1/2 Steel flanges type (01, 11, 12) shall be provided by the contractor, this is general requirements for all kinds of valve for each .
3. The valves shall be complete with mechanical position opening indicator with hand wheel from ductile cast iron fusion bonded epoxy powder coated with spur gearbox for sizes above DN 300
4. The contractor shall provide four detailed repair manuals for the gate valves supplied; and a letter of certification from the contractor verifying that all requirements of EN Standard and these Specifications have been met.

VALVE JOINTS:

- All valves shall have, flanged ends, mechanical joint ends or screw joints to fit the pipe run in which they are used, except valves installed on push-on joint pipe shall have mechanical joint ends unless otherwise specified and the flange design on request.
- Flanges shall be raised face rated and drilled according to EN 1092-1/2 PN (16, 25, 40) Bars and face to face length according to DIN 3202 series F15 or EN558.

مشروع انشاء بوستر الطيبه- محافظة اريد

Regarding all standards or technical characteristics described hereafter, the contractor is required to submit certificates from third party inspectors recognized by the governmental tender directorate, its latest issue, but limited to following internationally recognized and accredited companies :

- 1) Bureau Veritas
- 2) Lloyds
- 3) SGS
- 4) WRAS
- 5) RSS

MATERIALS

1. Gate valve form size DN50mm and greater shall be Body wedge and bonnet of the material for pressure range 16 to 40 bars shall be ductile iron as listed in table below.

Material						
Today				Previously		
Code	Designation	Standard	Material No	Code	Designation	Standard
Ductile iron EN-GJS-400-15	EN-JS1030	EN 1563	5.3106	GGG-40	0.7040	DIN 1693-1
Ductile iron EN-GJS-500-7	EN-JS1050	EN 1563	5.3200	GGG-50	0.7050	DIN 1693-1
Ductile iron (EN-GJS-400-18-LT ¹)	EN-JS1025	EN 1563	5.3103	GGG-40.3	0.7043	DIN 1693-1

2. Valve stem (shaft) shall be stainless steel with minimum 13% chromium for water system, 17% chromium for waste water system as listed in table below.

3.

DESIGNATION	Material no	En standard
Stainless steels 316	1.4***	EN10088-1,2 or 3

4. Body, wedge and bonnet shall be of ductile cast iron GGG 40 or 50 according to DIN 1693 .And Nut shall be of bronze CuSn12Ni .
5. Stem shall be of stainless steel 316 while stem sealing shall be of PTFE.
6. O-Ring made of EPDM for water system, NBR for wastewater system.
7. Bolting should be of stainless steel 316.

8. Hand wheel made of non wounding Steel or Ductile Cast Iron

DESIGN

1. Resilient seat to EN 1074-2 and EN 1171 Wedge full lining with EPDM for water system and NBR for wastewater system process for pressure range 16 bars only.
2. Wedge will be equipped with polyamide gliders to protect the gate and body guides coating from wearing. Gliders should be preferably directly fixed to the Iron Gate and protection against corrosion of the wedge shall be assumed by the system glider/rubber.
3. Metal seated to EN 1074-2 and EN 1171 non resilient seat, tapered wedge design Flexible wedge type 700HJ or Split wedge=Type 700 JJ for pressure range greater than 16 bars.
4. Fully guided wedge for resilient and non-resilient gate valves.
5. Body/bonnet junction can be either realized with or without bolts, to avoid corrosion.
6. All bolts and nuts shall be of stainless steel 316 or Bronze.
7. Face to face :
 - Face to face dimension for the pressure range up to 16 bars accordance to EN558-1 basic series 14 (previously DIN 3202 F4) ;
 - Face to face dimension for the pressure range 25 bars accordance to EN558-1 basic series 15 (previously DIN 3202 F5) ;
 - Face to face dimension for the pressure range 40 bars accordance to EN 558-1 basic series 15 (previously DIN3202-F5,).
8. Gate valve shall be designed with flanged end on both sides rising face according to EN 1092-1/2.
9. Fixed stem seal (O ring seal) with minimum double O-Ring stem sealing and replaceable seal under pressure according to ISO 10079.
10. With draining plugs for waste water system.
11. Optional prepare for bypass for pressure range 40 bars.
12. Up to DN 200 the valves shall have a maximum operating torque of(DN) Nm. A gear box will be added if necessary to reach a maximum operating torque of 300

Nm (The valve from size 200mm and grater shall mountain with gear unite for pressure rang 25 bar and grater).

13. Inside screw stem(NRS)

14. The valves shall be complete with mechanical position opening indicator with hand wheel from ductile cast iron fusion bonded epoxy powder coated with spur gearbox for sizes above DN 300.

15. Rotation of opening :

All valves shall open by turning to the left or counter clockwise, when viewed from the stem (clockwise closing).

COATING

1. All internal and external ferrous metal surfaces shall be fully coated, blue color, holiday free, to a minimum thickness 250 microns at least with a hot epoxy powder coating or two part thermosetting epoxy coating. Said coating shall be non-toxic, impart no taste to water, and shall be in accordance with British, French or German drinking water national regulations.
2. The valves shall be shot blasted before coating according to specifications and shall be coated inside and outside with fusion bonded epoxy powder minimum 250 microns in RAL 5015.
3. The valves shall be complete with mechanical position opening indicator with hand wheel from ductile cast iron fusion bonded epoxy powder coated with spur gearbox for sizes above DN 300.

MARKINGS

Markings shall be in accordance with EN 19 and shall include (size, working pressure, name of manufacturer, and year of manufacture).

TEST

1. Final production tests in accordance with EN 1074-2 or EN 12266-1 (when EN 1074-2 not applicable).
2. Drinking Water use valves are in accordance W270 OR British, French German drinking water national regulations.
3. Life cycle test.

iii. Butterfly Valves

GENERAL

مشروع انشاء بوستر الطيبه- محافظة اربد

1. Butterfly valves shall comply with EN 593 standard latest revision. For drinking water valves from DN 50 to 2000mm, PN (16 , 25 , 40)Bars shall also comply to EN 1074-2 standard latest revision. Butterfly valves shall be of the tight closing, metal seat type with recess–seat. Rubber gasket will be fixed on the butterfly and replaceable without removing the shafts.
2. Directions of flow shall be satisfactory for applications involving valve operation after long periods of inactivity. Valves being tight in the two ways will be preferred.
3. Valve discs shall rotate 90 degrees from the full open position to the tight shut position. Obturator disc will be of double accentuated type.
4. The valves shall have the possibility for horizontal and vertical installation by changing the lever position only.
5. the contractor is required to submit certificates from third party inspectors recognized by the governmental tender directorate, its latest issue, but limited to following internationally recognized and accredited companies:
 - Bureau Veritas
 - Lloyds
 - SGS
 - WRAS
 - RSS

MATERIALS

1. butterfly valve form size DN50mm and greater shall be Body wedge and bonnet for Pressure range (16 to40) Bars shall be ductile iron as listed in table below.

Material						
Today				Previously		
Code	Designation	Standard	Material No	Code	Designation	Standard
Ductile iron EN-GJS-400-15	EN-JS1030	EN 1563	5.3106	GGG-40	0.7040	DIN 1693-1
Ductile iron. EN-GJS-500-7	EN-JS1050	EN 1563	5.3200	GGG-50	0.7050	DIN 1693-1
Ductile iron. (EN-GJS-400-18-LT ¹)	EN-JS1025	EN 1563	5.3103	GGG-40.3	0.7043	DIN 1693-1

2. Valve shaft shall be stainless steel minimum 13% chromium for water system 17% chromium for waste water system.

Designation	Material no	En standard
Stainless steels 316	1.4***	EN10088-3

3. Sealing seat ring (metal sealing corrosion and wear resistance sealing surface) shall welded– on or rolled on the body and made of :
- A. Stainless steel.
 - B. Chrome-nickel
 - C. Bronze for wastewater only.
 - D.
 - E.
 - F.
 - G. (EN 10088 -3/2,2.0975,2.1020,Ni)
4. Internal bolts shall be stainless steel minimum A2 according to EN 10088-2/3.
5. O-Ring and seat gasket shall be made of EPDM used in Drinking Water system and will be in accordance with British, French or German national regulations for water system.

DESIGN

- 1. Face to face to EN 558-1 basic series14 and (previously DIN 3020 F4).
- 2. With Flanged end on both sides rising face accordance to EN 1902-1or 2.
- 3. With gear box featuring position indicator (for non buried valves) and mechanical stops.
- 4. Bearing sealing with minimum double O-Ring on both sides.
- 5. Disk with close disk eyes.
- 6. Tight in both side.
- 7. Valves shall be suitable for installation in either horizontal or vertical position.
- 8. Double eccentric bearing of disk butterfly valve.

COATING

All internal and external ferrous metal surfaces shall be fully coated, blue color, holiday free, to a minimum thickness 250 microns at least with a hot epoxy powder coating or two part thermosetting epoxy coating. Said coating shall be non-toxic, impart no taste to water, and shall be in accordance to

W270 OR British, French German drinking water national regulations.

MARKINGS

Markings shall be in accordance with EN 19 and shall include (size, working pressure, name of manufacturer, and year of manufacture).

TEST

1. Final production tests in accordance with EN 1074-2 or EN 12266-1 (when EN 1074-2 not applicable);
2. Drinking Water use valves shall be in accordance with British, French or German drinking water national regulations.
3. Life cycle test

iv. Air Valves :

Single Air Valve DN 50

Air Valves shall be single automatic air valves, PN 16, PN25, PN40 and PN50 according to the final design performed by the contractor, with body/bonnet of Acetal with PE shield for UV protection, and shall be inside and outside epoxy powder coated complying in general with DIN 30677 part 2, coating thickness shall be minimum 250µm, freedom from imperfections shall be tested by high-voltage method.

Air Valves shall be either with DN 50 female thread or with Flange DN 80.

Double Air Valve DN 100

Double orifice air valves shall be of the triple function type with a flanged inlet to EN 1092-2 PN 16, PN25, PN40 and PN50 according to the final design performed by the contractor (DIN 28605 / DIN 2501/BS 4504) and shall be suitable and approved for the use with potable water.

Body and cover shall be of ductile iron EN-GJS-400-18 acc. to EN 1563 (GGG 400 - DIN 1693) and shall be inside and outside epoxy powder coated complying in general with DIN 30677 part 2, coating thickness shall be minimum 250µm, freedom from imperfections shall be tested by high-voltage method.

Orifice and float balls shall be of corrosion free material (stainless steel or plastic), all seals shall be of EPDM or NBR suitable and approved for potable water.

Automatic Air Valve, Single-Chamber Type

Single-chamber valve directly operated by the medium;

Two-orifices venting system with 3 functions (supply and release of air as well as automatic venting during operation);

مشروع انشاء بوستر الطيبه- محافظة اربد

Safe operation even under high-volume, high-speed venting up to sonic speed;

With test and purge connection;

Body and cap made of ductile cast iron EN-JS 1030 (GGG-40);

Inner parts made of stainless steel grade 316 (DN 50 float made of plastic);

Seal made of EPDM.

Equipped with inspection valve.

Corrosion protection:

Inside and outside with epoxy coating to GSK standards for heavy-duty corrosion protection to DIN 30 677-2, coating thickness >250 µm, colour: RAL 5005 blue

- Air valves shall be installed as follows:

- A.** For black steel main pipelines, the contractor shall cut a hole in the transmission Pipeline and install and weld a black steel pipe of suitable length and diameter provided with the appropriate slip - on flange with a neck to suit the flanged air valve.
- B.** For ductile iron main pipelines, the contractor shall install a suitable flange tee (T) and install a pipe of suitable length and diameter in order to install the A.V provided with a neck to suit the flanged air valve.
- C.** The Welding and the air valve pipes welded joints together with flanged joints, shall be properly protected in accordance with the specifications.
- D.** Air valves with diameter 1 ½ “ and larger shall be installed in concrete valve chambers according to the Standard Drawings.
- E.** Air valves with diameter 1 ¼ “ and less shall be installed in the ground according to the Standard Drawings.

v. Wash-Outs :

The types of wash - out specified for this contract, whether in concrete chambers or buried type are as shown on the Standard Drawings. All wash - outs will be constructed as indicated on these Standard Drawings or as instructed by the Engineer.

At places shown on the drawings or directed by the engineer, wash - outs shall be installed as follows:

- A.** For black steel main pipeline; the contractor shall cut a hole at the lower part of the transmission main, install and weld a steel pipe of suitable length and diameter provided with a slip - on welding neck flange to suit the flanged washout valve.
- B.** For ductile iron main pipelines, the contractor shall install a suitable flanged tee (T) to install the flanged washout valve.

C. The welding and the W.O pipes welded joints together with flanged joints of the valves shall be properly protected in accordance with the specifications.

D. The wash - out pipes shall be extended to such a length and reach discharge area as is required for every particular site condition as not to flood the trenches or cause any damage to the surrounding area.

The unit price of wash - out pipelines shall also include all concrete and other works at the end of W.O pipelines (outlet structure with riprap) as shown on the drawings, unless otherwise noted .

vi. WATER METER (MECHANICAL):

DIGITAL PROPELLER TYPE – MECHANICAL :

The water meter shall be flange ended of the helical type and shall have a registration dial with six digit integrator calibrated to read in cubic meters and shall be of the straight reading type and shall have cover plate and a bank lid to be fitted in place of the lid fixed to the metering mechanism, in case the later is removed for repair.

The water meter shall be suitable for a working pressure as indicated on the Drawings and the Contractor shall supply the tapers and the necessary flanges required for the proper completion of the work.

The length of the pipes connected to and from the water meter shall be at least ten (10) times the diameter of each pipe away from fittings or valves.

The Contractor shall supply install and operate these type of flow meters to measure the flow in water mains, it shall be installed as located on the Drawings. The nominal working pressure of these flow meters type shall be as indicated on the Drawings.

vii. Electro-Magnetic Flow Meter

Electromagnetic flow meter shall be used for measurement of drinking water with a minimum conductivity of $\geq 50 \mu\text{S/cm}$. The measuring system consist of a transmitter and a sensor in remote version: Sensor is mounted separate from the transmitter with display like two mechanical units. The length of cable between units cannot exceed 10m.

Inner diameter of flow meter shall be same like inner diameter of flow meter flanges without any reduction of diameter.

The measuring tube of the electromagnetic water meters shall be made stainless steel. Supply voltage of all measurement system shall be on electric network 240 V / 60 Hz with all protection of non-regular electric supply. This means that Contractor shall supply and install UPS with minimal 3 hour of working during interruption of power supply from electric network.

مشروع انشاء بوستر الطيبه- محافظة اريد

Degree of protection shall be IP67 (NEMA 4X) for transmitter and IP 68 (NEMA 6P) for sensor.

Shock and vibration resistance shall be acceleration up to 2 g following IEC 600 68-2-6.

Electromagnetic compatibility (EMC) shall be as per EN 61326, emission shall be to limit value for industry EN 55011. Flow meter shall be earthed.

Housing shall be of adequate metal material with proper outside/inside corrosion protection.

Electromagnetic flow meter for drinking water application, used materials, assembling grease and service lubricants shall be approved by any worldwide certificate organization for usage in system with drinking water. Flange connection shall be according to EN 1092-2.

Transmitter with display shall provide possibility to connect devices for wireless remote collecting data. Maximum measured error shall not exceed 5% on water velocity 0.05 m/s.

The transmitter display shall be clear visible, readable, with sufficient number of characters.

Transmitter shall displayed flow rates, flow and total flow. Box of transmitter display shall be manufactured by robust plastic material or corrosion resistant metal. Supply and installation includes flow meters equipment, appropriate electro enclosure for electric supply, UPS for minimum 3 hours reserve, cabling and testing.

The meter shall be either programmed before dispatch from the manufacturer or be capable of being re-programmed on site to suit prevailing conditions.

The specification of the Converter shall be further as follows:

Characteristics of Converter for EMF

Installation	Remote (incl. Cable)
Housing Protection	IP 68
Bi-directional flow rate	Yes
Auto-Zero	Yes
Outputs	Programmable: 0/4-20 mA powered
Input	Programmable Remote auto zero
Self-diagnostic functions	Erroneous setting Empty pipe detection

Installation	Remote (incl. Cable)
Working Temperature (from/ to)	-15 °C to + 60°C

The Contractor shall submit a comprehensive specification regarding manufacturer, meter type, design and performance to be filled in the datasheets

viii. Pressure Gauges:

The pressure gauges shall be from an approved manufactures.

All gauges shall have concentric dials of 150 mm. diameter ,or as approved by the Employer .

The graduation of the pressure shall be in 0.5 bar:

- a) For suction pipes from 0.00 – 5 bar.
- b) For discharge pipes from 0.00 – 25 bar or from 0.00 – 40 bar.

The cover of the facia shall not be less than 4 mm. glass.

The gauge mechanism shall be of the Bourdon tube type, having stainless steel movments and shall comply with BS.1780 . It shall be sealed from the liquid being measured by means of a diaphragm or capsule and be filled with silicon oil.

The gauge shall be fitted with a pressure snubber, I.e. orifice, to dampen pressure pulsation . In addition to a small stopcock for venting.

Each gauge must have a test certificate stating that it is tested according to BS. 1780 and confirming that it is the required accuracy.

ix. Flexible Couplings and Flange Adaptors:

For connection of the existing to the new pipeline system, flexible couplings shall be installed as indicated on the drawings or as directed by the Engineer.

Couplings must be capable of adapting to different pipe materials.

Flexible couplings and flange adaptors shall be of mild steel and of an approved type suitable for making a watertight flexible connection between plain-ended pipes, or between a plain-ended pipe and a flanged fitting (e.g. Viking-Johnson couplings as manufactured by the Victualic Co. Ltd. Or Dresser Couplings as manufactured by the Dresser Manufacturing Division in the U.S.A.' or equivalent approved by the Engineer.

Unless otherwise specified, the external and internal surfaces of couplings and adaptors shall be cleaned down to a metallic finish, then primed and painted with epoxy resin paint, applied by an electro static process.

All mechanical couplings shall be of appropriate internal diameter and shall be capable of withstanding the maximum working test pressure specified for the pipes they are to connect, including a joint deflection of up to 3 degrees in any direction.

All mechanical couplings and flange adaptors shall be supplied complete with all necessary coupling rings, nuts, bolts, washers and rubber rings. Wedge joint rings shall comply with BS.2494, and shall be made of nitrile rubber, ethylene propylene rubber (EPDM) or styrene butadiene rubber (SBR) or other approved materials.

Bolts and nuts of galvanized steel shall be hexagonal with dimensions in accordance with BS. 4190 or DIN. 601/555.

Where a Harnessed Steel Flange Adaptor is shown on the drawings, the bolts connecting the flange of the Flexible Flange Adaptor to the Flange of the adjacent fitting shall be replaced by tie-bars threaded at both ends.

One threaded end of each tie bar shall pass through holes in the abutting flanges and be anchored by two nuts to make the flanged joints in the normal way. The other threaded end shall be anchored by two further nuts in a corresponding bolt-hole on the flange, soundly welded integrally onto the fitting which it is intended to harness to the adaptor.

The integrally-cast flange on the flange-spigot shall be located such that, after the joint has been made and all nuts fully tightened, the integrally-cast flange is about 400 mm axially from the abutting flanges.

The bolt circles on all the flanges shall comply with BS 4504 PN 16, as specified.

The threaded tie bars shall be machined from steel at least equal to that specified for flange bolts of corresponding duty and threaded in the same way. The threaded length shall allow the nuts to be run forward sufficiently to permit complete withdrawal of the tie bars from the flange of the abutting fitting without requiring any other joint to be dismantled.

The strength of the threaded tie-bars in both tension and compression shall be appropriate to the pressure rating of the flanged joints.

x. Dismantling Joints:

Dismantling joints shall be provided and installed with each valve as indicated on the Drawings for convenient installation or re-installation of valves or similar items.

For prevention of any move of the pipe joints adjacent to closed valves, dismantling joints shall be provided in general by restrained dismantling pieces (short version) according to DIN. 2541 or DIN 2547 or flanged adapters as indicated on drawings or as directed by the Engineer.

Body and glands of steel welded dismantling pieces shall be of pressure similar to the valve or pipeline connected to it, with bolts and nuts of stainless steel. Surface protection by epoxy resin coating or equivalent quality. Rubber sealing rings made of Perbunan material, nitrile rubber or equivalent quality, shall be used.

xi. Surface Boxes

Cast Iron surface boxes with round lid according to DIN. 4056 shall be supplied for operation of valves as described. Surface boxes shall be suitable for a 100 kN load.

The surface box made of cast iron or ductile iron shall be situated at ground level on the road or pavement.

The hinge of the lid shall be of non-corrosive material. Circular lids shall be used for valves (gate and butterfly).

Surface boxes shall have a cold applied bituminous black paint coating.

Surface boxes shall be supported by - reinforced concrete slabs of 65 mm. thickness to suit the surface box.

xii. Reinforced Concrete Valve Chambers:

Where shown on Drawing, a complete valve chambers of reinforced concrete shall be constructed for all kinds of valves and air relieves valves.

Valve chambers and similar structures shall be built into the pipe lines as demanded and in accordance with the Standard Drawings. Given dimensions on the drawings are to be verified by the Contractor so as to suit the pipe installation and the prevailing conditions on site.

Reinforced concrete valve chambers shall be constructed of cast in-place concrete in accordance with the detailed typical Drawings.

Valve chambers shall be allowed to cure for at least (7) days before backfilling .

Concrete supports for pipes, valves and any other fittings shall be placed at appropriate locations inside the chamber under the direction of the Engineer (even if not shown on the Standard Drawings).

مشروع انشاء بوستر الطيبه- محافظة اريد

Cast iron manhole covers with frames shall be installed for all valve chambers as specified or shown on the drawings. The wording on each cover shall be agreed with and approved by the Engineer prior to ordering.

Covers to be used in surfaces which are subject to vehicular traffic shall be tested for a load of 400 kN.

Manhole covers with bearing capacities of 40 kN and 250 kN according to DIN. 1229 shall be installed as instructed by the Engineer.

Two pairs of keys for use with each type of cover shall be handed over by the Contractor after completion of the Contract at no extra cost.

As shown on the Drawings, all valve chambers shall be equipped with step irons, which shall be of malleable cast iron, according to DIN 1211 or galvanized iron or as directed by the Engineer.

Types of Drainage for the valve chambers shall be according to the Standard Drawings or decided on site.

Penetration holes with G.S. sleeve pipes shall be inserted in the ceiling slabs, details of which are shown on the Standard Drawings, so as to incorporate the extension spindles of the valves inside the concrete chambers.

Ventilation pipes as instructed shall be installed at the highest possible point in all air release valve chambers (considering traffic load) and led to the nearest convenient outlet above ground. End of pipe to be flanged with a stand pipe equipped with protection cap including non-corrosive insect screen. Ventilation pipes shall be covered by the price of the valve chamber.

Structural calculations including reinforcement drawings for all valve chambers shall be made by the Contractor and submitted for approval by the Engineer. These calculations are to take into consideration the prevailing load and soil conditions.

The cost of reinforcement for concrete chambers shall be included in valve chambers.

All items as described above as well as additional excavation and back filling works shall be included in the valve chambers.

xiii. Flow Control and Shut-Off Valve for Drinking Water

One-piece body;

Corrosion protected bearing in the body by way of double O-ring seal and encapsulated shaft seal;

Wear-resistant, corrosion-resistant and infiltration-proof piston guides in the body by way of micro-finished bronze weld overlay;

Designed for cavitation-free operation in all modes of operation;

Piston sealed by quad-ring;

مشروع انشاء بوستر الطيبه- محافظة اربد

Anti-blowout shaft;

Body made of ductile cast iron EN-JS 1030 (GGG-40);

Made of stainless steel grade 304;

Retaining ring made of stainless steel grade 304;

Crank gear up to DN 600 made of stainless steel type grade 304; from DN 700 made of cast iron EN-JS 1030 (GGG-40, epoxy-coated);

Valve seal made of EPDM;

Valve shaft made of stainless steel grade 304

Bolts in touch with the medium made of stainless steel grade 316;

Maintenance-free shaft bearings made of bronze;

With self-locking, encapsulated, maintenance-free worm gear in protection degree IP68, incl. mechanical position indicator;

xiv. **CONTROL VALVE PLUNGER TYPE – TENDER TEXT**

1. Main features:

- a. Performance: The valve shall be designed to operate smoothly throughout the specified flow range without cavitation, excessive noise, or vibration for the conditions stated in 2.01 B below.
- b. Noise: Operating noise levels shall not exceed 95 decibels (dBA) at a distance of three 1 m from the valve at the normal flow point. Flow rate as a function of pressure drop across the valve shall be linear.
- c. Plunger Valve must be drop tight in closed position
- d. Operation Data

The contractor must provide the following data for the flow control valves:

1. Maximum Flow Rate Condition Data:
 - Flow Rate:
 - Minimum Inlet Pressure:
 - Maximum Outlet Pressure:
 - Kind of operation (continuous)
2. Minimum Flow Rate Condition Data:
 - Flow Rate:
 - Maximum Inlet Pressure (Design):
 - Minimum Outlet Pressure:

Kind of operation (continuous)

3. Normal Flow Rate Condition Data:

Flow Rate (Design):

Normal Inlet Pressure:

Normal Outlet Pressure:

Kind of operation (continuous)

2. CONTROL VALVE OPERATING REQUIREMENTS

- a. Valve Assembly Components: Each control valve assembly shall consist of a flanged short conical inlet section having an internal cone to divert the water flow into the annular chamber of the body section.
- b. An oval body section with an inner annular chamber shall be formed by the body shell. The plunger with slots is part of internal slider-crank mechanism and is driven by an outside wormgear.
- c. The plunger shall move in an axially flow direction to reduce or enlarge the annular flow cross section through slots in a degressive manner, and the medium will flow through the customized regulating cylinder from the outer annular chamber to the inner chamber of the plunger, shall be provided for flow control without cavitation. This has to be documented by curves
- d. The outside of the plunger shall seat against a QUAD-sealing-ring at its upstream end which will be against medium pressure from both upstream and downstream sides, and shall have a profile sealing ring which will seat against a stainless steel seat at the downstream valve body end.

3. CONTROL VALVE DESIGN FEATURES

- a. Control valve shall be a one-part-body design and shall feature an interior geometry that provides water flow that is guided around the streamlined internal body structure. The design shall feature a geometrically optimized design, a continuous annular cross sectional reduction from inlet to throttle cross section, and continuous rise of flow velocity to the exit without producing cavitation.
- b. Control valve design shall feature specially customized designed slotted cage to minimize cavitation. Slotted cage must be of portable type. It must be movable with the plunger. Slots shall be fully closed when the valve is placed in the closed position.
- c. Control valve design, when open during operation, shall feature plunger assembly movement in the upstream side direction to release water through the slots.
- d. Control valve design shall feature advance and retract axial strokes of the plunger, guided in the internal body by an internal slider-crank mechanism.
- e. Motion shall be controlled by means of electric actuator or hydraulic cylinders attached to the body section.
- f. The design of the annular throat cross section in any position of the plunger shall ensure linear regulation of flow.
- g. The proposed valve actuator shall operate in accordance with the requirements of Section Specifications for Electric Motor Actuators.

- h. Actuation: The plunger valve shall be actuated as specified by the purchasing documents, or as described in Section A – Specifications for Painting and Coatings Electric Motor Actuators shall be no more than five (5) times the normal operating force required at minimum inlet head conditions.
- i. Connections: Valve end connections shall be provided by EN 1092 standard pattern flanges for the size and pressure rating specified.

xv. Ultrasonic Level Meter

The function of this level meter is to determine the water level in the water reservoir for controlling the operation of the pumps.

At this measuring instrument an echo system transmits ultrasonic pulses towards the water surface from above and receives the returning echo. It determines the level from the speed of sound, the propagation time, and the sensor height. The complete measuring system consists of the ultrasonic level meter and the fitting measuring transmitter.

Sensor

The ultrasonic sensor shall provide:

- Type Ultrasonic pulse echo type with flange or bracket
(Measurement will be based on the distance time)
- Sensor beam angle $\pm 12^\circ$ or 8°
- Frequency 44kHz
- Material PVDF, PP-GF, ETFE
- Measuring Range 0 – 10m/sec
- Protection IP 68
- Ambient temperature $-20^\circ\text{C} - +80^\circ\text{C}$
- Power supply: 24 VDC.
- Output signals, 4 - 20 mA
- Integrated temperature sensor for compensation.
- Connection to transmitter via appropriate length of cable
- Permanent measurement of the water level.
- Field-mounted of the water level.
- Transmitter

مشروع انشاء بوستر الطيبه- محافظة اريد

- Display LCD TFT (level, Trend, Graph, Temp.) with back-light
- Output signals 4 – 20mA, RS-485
- Alarm HH, H, L, LL
- Power supply 230V AC +/- 10%, 50Hz
- Protection IP 66
- Ambient temperature - 20°C - 60°C
- Accuracy Better or equal to +/- 0.2% FS
- Cable and temperature compensation.

The installed meter shall be resistant against, humidity, dust and weathering. The function and the accuracy of the meter should not be affected by these phenomena. The sensor for temperature compensation has to be installed by using a suitable mounting fixture so that the temperature over the measuring distance is gathered reliably.

The reliability of measurement by ultrasonic signal must not be affected by any other fittings inside the tank. The detector must be mounted so the transmission is perpendicular to the water surface. The detector heads shall be capable of measurement over the full range of water levels and shall be designed to withstand immersion in water in the event that the tank becomes overfilled. All fittings must be easy to access and to remove for maintenance or repair.

The sensor has to be mounted to a cantilever that is fixed to a pole on the edge of the wet well. The distance to the water surface must be more than the sensors block distance. The measuring ultrasonic signal must not be disturbed by any fittings inside the wet well to get reliable results. All mounting material is also included.

The Contractor should submit a detailed structure for installing the sensor using a steel arm. The sensor shall be fixed inside steel enclosure with ingress protection IP=64, this structure should be deemed to be involved in the price of the level meter.

The Display panel of the ultrasonic level meter should be mounted inside pumping station control room

xvi. Alarm System

An alarm system shall be provided at the site for the detection of water when reaching the alarm level. The sensor shall have sufficient contacts to control the audible and visual alarms as described below. The alarms to be raised shall be as follows:

1) Visual alarm lights.

2) Audible alarm.

The visual alarm lights shall be red in color and display a flashing steady light to indicate the water level alarm.

The supply and installation of the visual and audible alarms together with all necessary wiring between these items and the ultrasonic level sensor unit shall be included.

The alarm lights shall be clearly visible at a distance of 20 meters under normal daylight conditions. Alarm lights shall remain in operation at all times while the water level is above the alarm level. Facility shall however be provided to mute the flashing alarm and the audible device with an externally mounted alarm acknowledge button.

The audible alarm shall have a 50-meter range. Audible alarm muting button shall be provided directly below the alarm.

xvii. Float valve

Straight through control valve to EN 1074

The valve opens when the level falls below a pre-defined set point.

For drinking water up to 60° C

Face-to-face length to DIN EN 558-1

Own-medium controlled valve with visual position indicator;

Pilot valve (float) integrated into the control circuit for regulation without external energy supply;

Wear-resistant, corrosion-resistant and penetration-proof seat due to micro-finished chromium-nickel weld overlay;

Preformed diaphragm, position fixed by sealing bead for reliable sealing of the body;

Cavitation-free operation due to control inserts;

Valve seat with chambered and pull-out proof profiled sealing ring;

Impressed threaded inserts of stainless steel for the connection of the control lines for consistent corrosion protection;

Manual venting of trapped air;

Separate control lines and pressure gauge;

Separate adjustment of opening and closing speed;

Fine-pored filter with inspection glass to view contamination in the control circuit, including stop-cock for purging;

User-friendly reading of the operating pressures by 2 glycerine-filled pressure gauges to determine the actual inlet and outlet pressures;

All internal parts accessible from the top for maintenance without disassembling the valve from the pipeline;

مشروع انشاء بوستر الطيبه- محافظة اريد

Tightness to DIN EN 12,266-1, leakage rate A;

Flange connection dimensions according to EN 1092, Part 2;

All parts in contact with the fluid to KTW and DVGW Code of Practice W270 (no build-up of harmful bacteria);

Body and cover made of cast iron EN-JS 1030 (GGG-40);

Diaphragm and seals made of EPDM;

Control insert, control line, speed adjustment and screwed connections made of stainless steel;

Filter housing made of stainless steel, with inspection glass made of pressure-resistant polypropylene;

Corrosion protection:

Inside and outside fusion bonded epoxy coated in GSK type "heavy-duty corrosion protection" to DIN 30 677-2, coating thickness > 250 µm, RAL 5005 blue; no bare casting places in the area of the connections;

Control circuit:

The connection line (diameter 12 mm) between the main valve and the float pilot must be mounted by the customer on site.

Design specifications: SHALL BE COORDINATE WITH DESIGNER

Head losses should be less than 2 m

Inlet pressure: p1 max = bar

Inlet pressure: p1 min = bar

Outlet pressure: p2 = bar

Flow rate: Q = m³/h

Float pilot: 1 float

or 2 floats Operating distance m

Varieties:

DN upon request

PN upon request

Type with two floats (min/max control)

xviii. ALTITUDE VALVE

Altitude valve shall Control the level of water in reservoir via a slave ball cock in the top of the reservoir.

Small-bore piping in an approved non- corrodable material shall connect the ball cock to the underside of a diaphragm in the relay valve, then through a needle cock to strainer block on the inlet side of the valve.

مشروع انشاء بوستر الطيبه- محافظة اريد

With a fall of water level in the reservoir and opening of the ball cock, the relay valve shall open, allowing a pressure reduction above the main valve diaphragm. This shall cause the main valve to open and allow filling of the reservoir. When the water level in the reservoir reaches top water level, closure of the ball cock shall cause the relay valve to shut. This shall in turn lead to a buildup of pressure above the diaphragm and hence closure of the main valve.

The rate of response of opening and closing of the main valve shall be controlled by an adjustable needle valve which shall enable the operation to be executed slowly, preventing sudden closure likely to cause problems on the pipeline. The main valve shall open fully in response to a fall of 200 mm. or less in the water level of the reservoir.

Details and materials of altitude valve shall otherwise be as specified below. It shall be double-flanged gray or ductile cast iron. Flanges shall be to BS. 4504, PN.16. The nominal diameter shall be as shown on the Drawings.

All materials used in the manufacture of the valve shall conform with the following minimum standards:

Body, Cover and Disc: Spheroidal graphite iron to BS.2789

Valve guide, rings etc.: Gunmetal to BS. 1400, Grade, LG2.

Liner: Bronze, to BS. 2870.

Seating Face: Gunmetal, Synthetic or other approved material as appropriate.

Indicator Rod: Stainless steel to BS.970 part 4 Grade: 316529.

Actuating Valve Body: Bronze to BS.2870.

Spindle: Stainless steel to BS.970 Part 4 Grade : 316529.

Valve Face: Nylon

Diaphragm and Bellows: Reinforced synthetic rubber or approved equivalent.

مشروع انشاء بوستر الطيبه- محافظة اريد

Orifice body and plate: Bronze to BS.2870.

Strainer: Cooper wire cloth.

Spring: Spring steel.

All detail parts not listed shall be in homogenous corrosion resistant material.

xix. Check Valve or Non return :

Metallic sealing slanted-seat tilting-disk check valve with internal damping unit

Disk in body with double offset bearing in bushes;

Disk geometry with optimum hydraulic flow pattern to ensure low pressure losses;

Wear-resistant, corrosion-resistant and infiltration-proof sealing seat in the body and on the disk due to Microfinished chromium-nickel weld overlay;

Closing times reduced by ca. 35% due to the slanted seat;

With internal damping unit for closing behaviour with reduced pressure surges;

Tightness to DIN EN 12 266-1, leak rate D;

Body and disk made of cast iron EN-JS 1030 (GGG-40);

Valve shaft made of stainless steel grade 1.4021;

Shaft bearings made of bronze

Corrosion protection:

Inside and outside epoxy-coated, colour: RAL 5005 blue

10 . Pressure Reducing Valves (PRV) :

The main valve shall be with throttling cone, counter piston, spring loaded. The valve shall maintain a constant downstream pressure regardless of varying inlet pressure .

The valve body shall be in cast iron GG. 25 for the minimum pressure rating as indicated on the drawings and the body shall have an epoxy coating both internally and externally.

The spring shall be of stainless steel 50 CrV4. The pilot control shall be a direct – acting, adjustable spring loaded, normally open, diaphragm. The pilot valve shall be in bronze or stainless steel and Pilot System tube in copper. The pilot valve system shall have a stopcock to isolate the valve if necessary.

The PRV. Shall have a device indicating the position of the moving part and shall have two manometers to measure the upstream and downstream pressures.

The flanges of the RRV. Shall comply with DIN. 2501. The PRV. Shall be hydrostatically tested at the factory at 1.5 times the nominal pressure. The downstream pressure shall be set as indicated on Drawings. It shall maintain the downstream pressure within a range of + 10% with respect to the pressure.

All necessary repairs shall be possible for without removing the valve from the line.

Flexible Couplings and Flange Adaptors:

- For connection of the existing to the new pipeline system, flexible couplings shall be installed as indicated on the drawings or as directed by the Engineer.

- Couplings must be capable of adapting to different pipe materials.

Flexible couplings and flange adaptors shall be of mild steel and of an approved type suitable for making a watertight flexible connection between plain-ended pipes, or between a plain-ended pipe and a flanged fitting (e.g. Viking-Johnson couplings as manufactured by the Victualic Co. Ltd. Or Dresser Couplings as manufactured by the Dresser Manufacturing Division in the U.S.A.' or equivalent approved by the Engineer.

- Unless otherwise specified, the external and internal surfaces of couplings and adaptors shall be cleaned down to a metallic finish, then primed and painted with epoxy resin paint, applied by an electro static process.

- All mechanical couplings shall be of appropriate internal diameter and shall be capable of withstanding the maximum working test pressure specified for the pipes they are to connect, including a joint deflection of up to 3 degrees in any direction.

- All mechanical couplings and flange adaptors shall be supplied complete with all necessary coupling rings, nuts, bolts, washers and rubber rings. Wedge joint rings shall comply with BS. 2494, and shall be made of nitrile rubber, ethylene propylene rubber (EPDM) or styrene butadiene rubber (SBR) or other approved materials.

- Bolts and nuts of galvanized steel shall be hexagonal with dimensions in accordance with BS. 4190 or DIN. 601/555.

- Where a Harnessed Steel Flange Adaptor is shown on the drawings, the bolts connecting the flange of the Flexible Flange Adaptor to the Flange of the adjacent fitting shall be replaced by tie-bars threaded at both ends.

- One threaded end of each tie bar shall pass through holes in the abutting flanges and be anchored by two nuts to make the flanged joints in the normal way. The other threaded end shall be anchored by two further nuts in a corresponding bolt-hole on the flange, soundly welded integrally onto the fitting which it is intended to harness to the adaptor.

- The integrally-cast flange on the flange-spigot shall be located such that, after the joint has been made and all nuts fully tightened, the integrally-cast flange is about 400 mm axially from the abutting flanges.

- The bolt circles on all the flanges shall comply with BS 4504 PN 16, as specified.

- The threaded tie bars shall be machined from steel at least equal to that specified for flange bolts of corresponding duty and threaded in the same way.

The threaded length shall allow the nuts to be run forward sufficiently to permit complete withdrawal of the tie bars from the flange of the abutting fitting without requiring any other joint to be dismantled.

- The strength of the threaded tie-bars in both tension and compression shall be appropriate to the pressure rating of the flanged joints.

Dismantling Joints:

Dismantling joints shall be provided and installed with each valve as indicated on the Drawings for convenient installation or re-installation of valves or similar items.

For prevention of any move of the pipe joints adjacent to closed valves, dismantling joints shall be provided in general by restrained dismantling pieces (short version) according to DIN. 2541 or DIN 2547 or flanged adapters as indicated on drawings or as directed by the Engineer.

Body and glands of steel welded dismantling pieces shall be of pressure similar to the valve or pipeline connected to it, with bolts and nuts of stainless steel. Surface protection by epoxy resin coating or equivalent quality. Rubber sealing rings made of Perbunan material, nitrile rubber or equivalent quality, shall be used.

Surface Boxes

Cast Iron surface boxes with round lid according to DIN. 4056 shall be supplied for operation of valves as described. Surface boxes shall be suitable for a 100 kN load.

The surface box made of cast iron or ductile iron shall be situated at ground level on the road or pavement.

The hinge of the lid shall be of non-corrosive material. Circular lids shall be used for valves (gate and butterfly).

Surface boxes shall have a cold applied bituminous black paint coating.

Surface boxes shall be supported by - reinforced concrete slabs of 65 mm. thickness to suit the surface box.

9. Reinforced Concrete Valve Chambers:

Where shown on Drawing, a complete valve chambers of reinforced concrete shall be constructed for all kinds of valves and air relies valves.

Valve chambers and similar structures shall be built into the pipe lines as demanded and in accordance with the Standard Drawings. Given dimensions on the drawings are to be

مشروع انشاء بوستر الطيبه- محافظة اربد

verified by the Contractor so as to suit the pipe installation and the prevailing conditions on site.

Reinforced concrete valve chambers shall be constructed of cast in-place concrete in accordance with the detailed typical Drawings.

Valve chambers shall be allowed to cure for at least (7) days before backfilling .

Concrete supports for pipes, valves and any other fittings shall be placed at appropriate locations inside the chamber under the direction of the Engineer (even if not shown on the Standard Drawings).

Cast iron manhole covers with frames shall be installed for all valve chambers as specified or shown on the drawings. The wording on each cover shall be agreed with and approved by the Engineer prior to ordering.

Covers to be used in surfaces which are subject to vehicular traffic shall be tested for a load of 400 kN.

Manhole covers with bearing capacities of 40 kN and 250 kN according to DIN. 1229 shall be installed as instructed by the Engineer.

Two pairs of keys for use with each type of cover shall be handed over by the Contractor after completion of the Contract at no extra cost.

As shown on the Drawings, all valve chambers shall be equipped with step irons, which shall be of malleable cast iron, according to DIN 1211 or galvanized iron or as directed by the Engineer.

Types of Drainage for the valve chambers shall be according to the Standard Drawings or decided on site.

Penetration holes with G.S. sleeve pipes shall be inserted in the ceiling slabs, details of which are shown on the Standard Drawings, so as to incorporate the extension spindles of the valves inside the concrete chambers.

Ventilation pipes as instructed shall be installed at the highest possible point in all air release valve chambers (considering traffic load) and led to the nearest convenient outlet above ground. End of pipe to be flanged with a stand pipe equipped with protection cap including non-corrosive insect screen. Ventilation pipes shall be covered by the price of the valve chamber.

Structural calculations including reinforcement drawings for all valve chambers shall be made by the Contractor and submitted for approval by the Engineer. These calculations are to take into consideration the prevailing load and soil conditions.

The cost of reinforcement for concrete chambers shall be included in valve chambers.

All items as described above as well as additional excavation and back filling works shall be included in the valve chambers.

TECHNICAL SPECIFICATIONS FOR WELDED BLACK STEEL PIPES & FITTINGS

I . Specifications for Welded Steel Pipes with Beveled ends
For (4", 6" and 8") diameters

- a - The pipes shall be in accordance with { API-5L, Grade of steel X42 } or { DIN. 2441 } or approved equivalent standards, high-tensile, longitudinally or spirally welded steel pipes.

The wall thickness and the test pressures shall be as follows :

Nominal dia. (ND) inch.	Outside Diameter (inch)	Thickness (mm)	Test Pressure (kg/cm ²)	standards
4"	4 1/2"	4.40	134	API or DIN
6"	6 5/8"	5.20	133	API or DIN
8"	8 5/8"	5.60	110	API or DIN

b- **Working Pressure :**

The maximum nominal pressure of all pipes shall not be less 40 bar.

c- **Average Length :**

Pipes shall have 6 meters length, equal length must be supplied.

d- **Beveled Ends For 4", 6" and 8":**

End of pipes must be calibrated and beveled by 30° degrees (plus or minus 5° degrees) for electric fusion butt welding.

e- **Internal Lining and External Coating :**

- Preparation of pipes surfaces before lining and coating:

- The surfaces of pipes shall be clean and free from scale, loose rust, oil ...etc. by :

a. Acid picking.

b. Abrasive shot blasting.

All in accordance with BS.4232 first quality as described in BS.534.

- Adhesion Test is required for lining and coating as described in BS.534.

e-1- Internal Lining :

All steel pipes of 4", 6" and 8" ND. shall have internal lining either :

- a. Cement lining according to AWWA - C. 205 or BS. 534 or approved equal.
- b. Zinc galvanization (Hot Dip) according to Din. 2441 or approved equal, which shall be odorless and tasteless suitable for the passage of chlorinated potable water 0-3 p.p.m.cl₂.
- c. Non-toxic 100% solids Amine epoxy according to AWWA C210-03 (Liquid epoxy coating systems for the interior and exterior of steel water pipelines) or approved equal.
- d. Non-toxic fusion bonded epoxy according to AWWA C213-01 (for the interior and exterior of steel water pipelines) or approved equal.

Lining must be suitable for drinking water. Non Metallic product for use in Contact with water must be in accordance with BS. 6920.

e-2- External Coating:

External coating of steel pipes and fittings shall be polyethylene sheathing (reinforced type) according to DIN. (30670), designation : Reinforced sheathing (V) .

The polyethylene sheathing shall be applied at manufacturer's works (plant) extruded and melted on and homogeneous to steel pipes with API 5L-X42 for buried installation . Between the polyethylene sheathing and the pipe steel there shall be an adhesive film which is applied electro-statically .

The polyethylene sheathing shall be made continuous extrusion and the adhesive film shall be firmly bonded to the steel surface. The coating shall be spark-free when tested with a Holiday detector at 25000 volts. The minimum coating thickness shall be 3.0 mm for pipes of nominal diameters up to 20", and 3.50 mm for 24" diameter pipes .

In addition to tests to DIN 30670 for coating and coating materials, the coating shall be tested for cathodic disbonding in accordance with ASTM G8. The polyethylene coating shall be capable of operating at a continuous temperature up to 50 C. without any effect on coating and bonding. The polyethylene and adhesive shall stop at a distance of 100mm plus the insert of the pipe for the spigot and 100mm for the end of the socket of

e-3- Protection of lining and coating:

The lined and coated pipes shall be transported through climate, so the manufacturer must take into account the choice of material.

Protection of lined and coated pipes against damages during storage, transport and handling is required either by using straw or wood wool pads.

The coating shall show no tendency of flow at a temperature of (70) degrees centigrade .

- e- 4 -The internal lining and the external coating for bevelled ends pipes shall stop 6” from each end of the pipe
- e- 5 - All welded and flanged joints of steel pipes, shall be protected and coated with the same coating materials of the steel pipes.

f. Marking:

The material shall be marked with the manufacturer's symbol or mark in addition to the code number, standard specification, and the inspector stamp. The pipes as well shall be stamped with the purchaser symbol, "WAJ"

Insulation Materials for Joints of All Pipes Sizes:

Sufficient quantity of insulating materials shall be included to cover the joints and fittings after welding the pipes and its cost shall be deemed to be included in the respective unit price .

- g. The bidder must give full information, details, technical data require in attached sheets and must also give full technical specifications of his bid in addition to manufacturer catalogue and standards, as well as the chemical and physical analysis.

Item	1	2	3
Diameter	4"	6"	8"
Nominal Diameter			
Outside Diameter			
Wall Thickness			
Working pressure			
Test pressure			
Wt/meter (bare)			
WT/meter with			
Lining & Coating			

Thick. Of lining			
Thick. of coating			
Length of pipe			
Standards			
Manufacturer			
Country of origin			
Welding process			
Type of welding			
Type of lining			
Type of coating			

II. Specifications for Welded Steel Pipes with Bevelled Ends For 10" Diameters & Above :

- a- The pipes shall be in accordance with (API - 5L, Grade of steel, x 42), or approved equivalent standards, high-tensile, longitudinally or spirally welded steel pipes .
- b -The wall thickness and the minimum mill-inspection test pressures shall be as follows:

Nominal dia. (ND) inch	Outside diameter (mm)	Outside diameter (inch)	Wall Thickness (mm)	Test Pressure (kg/cm ²)
10 3/4"	273.10	10 3/4"	5.6	100
12 3/4"	323.9	12 3/4"	6.4	96
16"	406.40	16"	6.4	77
20"	508.00	20"	7.1	73
24"	610.00	24"	7.1	61
32"	813.00	32"	9.5	61

C - Working Pressures :

The maximum nominal pressure of all pipes shall not be less than the value stated in the scope of works and / or Drawings.

d - Bevelled Ends:

End of pipes must be calibrated and beveled by 30° degrees (plus or minus 5° degrees) for electric fusion butt welding.

All welded and flanged joints of steel pipes, shall be protected and coated with the same coating materials of the steel pipes.

e- Average Length :

Pipes shall have an average length of 6 and / or 12 meters and as approved by the Engineer .

f- Internal Lining and External Coating :

The internal cement mortar lining shall be of 6.0 mm. and conform to all relevant requirements of BS. 534 / 1990 or AWWA. C.205 - 85 .

The unlined and / or uncoated wall of the pipe shall be protected by suitable harmless approved bituminous or epoxy paint .

The internal lining thickness shall not be less than the minimum thicknesses given in the following table :

Nominal Diameter (ND) inch	Minimum thickness (mm)	
	BS.534.1990	AWWA.C.205-85
10	6 (+2 , -0)	6 (+3.2 , -1.6)
12	6 (+2 , -0)	8 (+3.2 , -1.6)
16	7 (+2 , -0)	8 (+3.2 , -1.6)
20	7 (+2 , -0)	8 (+3.2 , -1.6)
24	7 (+2 , -0)	10 (+3.2 , -1.6)
32		10 (+3.2 , -1.6)

External coating of steel pipes and fittings shall be polyethylene sheathing (reinforced type) according to DIN. (30670), designation : Reinforced sheathing (V) .

The polyethylene sheathing shall be applied at manufacturer's works (plant) extruded and melted on and homogeneous to steel pipes with API 5L-X42 for buried installation .
Between the polyethylene sheathing and the pipe steel there shall be an adhesive film which is applied electro-statically .

The polyethylene sheathing shall be made continuous extrusion and the adhesive film shall be firmly bonded to the steel surface. The coating shall be spark-free when tested with a Holiday detector at 25000 volts. The minimum coating thickness shall be 3.0 mm for pipes of nominal diameters up to 20", and 3.50 mm for 24" diameter pipes .

In addition to tests to DIN 30670 for coating and coating materials, the coating shall be tested for cathodic disbonding in accordance with ASTM G8. The polyethylene coating shall be capable of operating at a continuous temperature up to 50 C. without any effect on coating and bonding. The polyethylene and adhesive shall stop at a distance of 100mm plus the insert of the pipe for the spigot and 100mm for the end of the socket of the pipe.

g- Marking:

The material shall be marked with the manufacturer's symbol or mark in addition to the code number, standard specification, and the inspector stamp. The pipes as well shall be stamped with the purchaser symbol, "WAJ"

Insulation Materials for Joints of All Pipes Sizes:

Sufficient quantity of insulating materials shall be included to cover the joints and fittings after welding the pipes and its cost shall be deemed to be included in the respective unit price .

- g. The bidder must give full information, details, technical data require in attached sheets and must also give full technical specifications of his bid in addition to manufacturer catalogue and standards, as well as the chemical and physical analysis.

Item	1	2	3	4	5	6
Diameter	10"	12"	16"	20"	24"	32"
Nominal Diameter						
Outside Diameter						
Wall Thickness						
Working pressure						
Test pressure						
Wt/meter (bare)						
WT/meter with						
Length of pipe						
Standards						
Manufacturer						
Country of origin						
Welding process						
Type of welding						
Type of lining						
Thick. Of lining						
Type of coating						
Thick. of coating						

III. SPECIFICATION FOR BLACK STEEL FITTINGS

a- Scope of Use :

The fittings must be made of seamless pipes and shall be in accordance with ANST (B.16.9). The fittings shall be welded to black steel pipes type (API. 5L - X 42) .

b- Fabrication of Fittings :

The fabrications of fittings shall be as follows :

1. Elbows must be fabricated by forging or by hot or cold forming of seamless pipes .
 2. Reducers must be fabricated by hot or cold forming and annealing of seamless pipes .
 3. Tees must be fabricated by forming of seamless pipe or by cold or hot forming and annealing of seamless pipes .
 4. Caps must be fabricated by hot or cold stamping or forging of plates heat treated .
- Fabrication fittings by welding pieces of pipes is not accepted .

c- Materials of Fittings :

Elbows, Tees, Reducers etc ... must be made of seamless pipe grade WPB .(ASTM. A 234) or approved equivalent .

d- Fittings Thickness & Pressure :

The minimum thickness of the black steel fittings shall be sufficient to withstand the pressure rating of their respective pipelines .

e- Elbows Bends :

The Elbows must be of long radius type, but short radius elbows can be offered as an alternative .

f- Reducers :

The reducers must be concentric. Thickness of each side shall be equal to thickness of related nominal diameter, if thickness of reduced size equal to the thickness of the bigger size, higher thickness will be accepted .

g- Straight Equal Tees :

The straight equal tees, in which the run and branch (out let) is equal in nominal diameter, thickness must be equal to the thickness of its related nominal diameter.

h- Tees Reducing :

Tees Reducing, in which the Run is bigger than branch (out let) in nominal diameter thickness of the run, must be equal to the thickness of its related diameter, thickness of the branch (out let) must equal to its related nominal diameter.

i- Coating and Lining :

All fittings must be lined by corrosion proof materials and must be suitable for potable water.

The coating must be of the same coating material as the pipes. Coating and lining must stop at the beveled ends for the purpose of welding.

j- Marking :

Every fitting must be marked with :

- Trade mark .
- Nominal Diameter .
- Thickness .
- Standard .

k- Certificate of Compliance :

Certificates of compliance of required standards is required

الجزء السادس

جداول الكميات

مقدمه:

- 1 - تعتبر جداول الكميات مع مقدمه جزء لا يتجزء من وثائق العطاء وتقرأ وتفسر على هذا الاعتبار .
- 2 - على المناقص وضع اسعارهم بالدينار الاردني .

تسعير البنود في جدول الكميات

- 1 - ان مواصفات ووصف الاعمال للبنود المبينه في جداول الكميات غير مفصله في الجداول وعلى المناقص مقدم العطاء الرجوع الى المواصفات والشروط للتأكد منها قبل وضع اسعاره.
- 2 - على المناقصين وضع اسعارهم الفريده للبنود على اساس السعر لكل وحده كيل لجميع الاعمال المبينه في جداول الكميات وتعتبر هذه الاسعار ملزمه للمقاول وصالحه لجميع الاعمال المطلوبة في أي موقع ضمن مناطق العطاء .
- 3- على المناقصين وضع اسعارهم الافريده لوحدۃ الكيل بالرقم والكتابه .
- 4- على المقاول تقديم مع عرضه الفني والمالي تحليل اسعار مفصل لكافة بنود جداول الكميات واي بنود مرتفعة عن الاسعار الدارجة يحق لصاحب العمل مفاوضة المقاول عليها.
- 5- تكون هذه الاسعار شامله لجميع التكاليف من ايدي عامله واجور واليات والارباح وأي مصاريف اخرى تترتب على المقاول بموجب شروط العقد ان كان منصوصا عليها صراحه او ضمنا، ولا يحق للمقاول المطالبه باي زياده في الاسعار لاي سبب كان الا في الحالات التي تجيزها شروط العقد .

6- يكون السعر للوحدة في جدول الكميات لاجمال اعمال تمديد انابيب المياه شاملا على سبيل المثال وليس الحصر توريد جميع انواع الانابيب على اختلاف اقطارها وجميع القطع من اكواع وتيهات ونقاصات وسدادات ومرابط والفلنجات والقطع الخاصة...الخ وحفر الخنادق وتمديد الانابيب وعمل وتنفيذ التوصيلات اللازمة وتوريد المعاجين والمواد اللازمة وتنفيذ وصلات الأنابيب الدكتايل وتركيب القطع حيثما يلزم وتوريد وصب الدعامات الخرسانية (Thrust Blocks) لأنابيب الدكتايل وكافة الفحوصات المخبرية وتوريد ووضع (الأدلة الكترونية والشريط التحذيري البلاستيكي) أو (الشريط التحذيري المعدني) ويشمل أيضاً تقديم جميع المواد والتجهيزات اللازمة واجراء فحص التسرب (الضغط الهيدروليكي) والغسيل والتعقيم وتغليف الوصلات والطم (من مواد مختارة) والطم الى السطح العلوي واعادة الاوضاع ونقل الانقاض ... الخ وجميع متطلبات العقد بموجب المخططات والمواصفات وحسب تعليمات المهندس المشرف .

7 - على المقاول ان يضمن اسعاره لتكلفة جميع الاعمال اللازمه للتحكم بالمياه حيثما تكون الحفريات في ارض مغموره بالمياه وحيثما يحدث تقاطع بين خطوط المياه والصرف الصحي والعبارات والمصارف السطحيه او خطوط مياه اخرى بما في ذلك الاحتياطات الضرورية لتوفير المياه لمنطقة العمل .

8- تشمل الاسعار الافراديه ايضا على سبيل التوضيح وليس الحصر الاعمال المؤقته والمعدات الانشائيه والحراسه والاناره وتوفير الممرات الآمنه للمواطنين والارباح واية نفقات اخرى شاملا جميع الاخطار والالتزامات الوارده او التي ينص عليها العقد .

9- اضافته الى ذلك فان الاسعار الافراديه والاجور تعتبر شامله لحمايه وتثبيت جميع اعمال المواسير والعبارات والكوابل وجميع الخدمات والمرافق المبينه وغير المبينه على المخططات التي يمكن ان تتعرض للخطر اثناء تنفيذ عمليات المقاول وتشمل الاسعار كذلك تكاليف الفحوص التي يطلبها المهندس وكذلك تشمل عمل وتحضير وتقديم المخططات التنفيذيه وكذلك المخططات المرجعيه .

10- تعتبر الاسعار الوارده في جدول الكميات التي يضعها المقاول انها القيمه الحقيقيه والشامله للاشغال الوارده والمطلوبه في جدول الكميات بموجب المواصفات والمخططات وتعليمات المهندس وانها تشمل ايضا ارباح المقاول وتعويضه عن أي التزامات اخرى قد يتحملها وفقا لشروط ومواصفات العطاء .

11- تكون الاسعار التي يضعها المقاول شامله حمايه الانشاءات القائمه والخدمات وازالة واعادة تركيب الاطارييف واعادة وضع السطوح كما كانت عليه والادراج وحديد الحمايه على جوانب الطرق والجسور واشارات المرور والاسيجه وكل الخدمات والمنشئات التي قد تتاثر بشكل مباشر وغير مباشر وكذلك ازالة او تغيير

مشروع انشاء بوستر الطيبه- محافظة اربد

خطوط المواسير القائمة تحت الارض واية خدمات اخرى وكذلك اعادة زراعة الشجيرات والتربة الزراعيه وكل ما يلزم وحسب تعليمات وموافقة المهندس .

12- على المقاول استعمال الاسمنت المقاوم للاملاح في جميع انواع الخرسانه الملامسة للتربة (خرسانة النظافة؟،قواعد الاعمدة، الجسور الارضية،جدران التعليات،الجدران الاستنادية واساساتها،تغليف الانابيب....الخ (وبدون أي علاوات او فروقات في الاسعار. الكيل والدفع:

1 - ان كميات الاعمال الوارده في جدول الكميات هي كميات تقديريه ومذكوره لتثبيت الاسعار الافراديه لنوع وقطر المواسير (وطبيعة مواد السطوح) التي يتوقع تنفيذها خلال مده العقد وهي قابله للزياده والنقصان بنسب غير محدد ويدفع للمقاول عن الكميات من الاعمال المنجزه فعليا والتي يوافق عليها المهندس .

2- على المقاول اخذ موافقة صاحب العمل على الكميات التي سيتم توريدها للمشروع بعد عمل المخططات التنفيذية واية كميات زائدة لم يتم الموافقة عليها من قبل صاحب العمل يتحملها المقاول.

3- أي عمل يقوم به المقاول ويكون غير مطلوب في العقد وليس بامر خطي من المهندس لن يكون مشمولاً في عملية الكيل.

4- تكال اعمال خطوط المياه المختلفه بالمتر الطولي الفعلي الذي ينفذه المقاول حسب نوع وقطر المواسير وحسب طبيعة مواد السطوح المختلفه وتقاس خطوط المياه المنفذة من النهايات المبينة على المخططات على محاور خطوط المواسير بدون حسم القطع من أنواع وتيهات ونقاصات ... الخ وتشمل عملية الكيل المواسير داخل غرف المفاتيح ما لم يذكر خلاف ذلك.

5- يدفع عن المفاتيح والهوايات الخ بانواعها واقطارها المختلفة بالعدد ويكون السعر للوحدة شاملا جميع ما يلزم بموجب وثائق العطاء ومتطلباته وشروطه.

جدول الكميات

الرقم	بيان الاعمال	وحدة الكيل	الكمية		سعر الوحدة		المبلغ الاجمالي	
			رقما وكتابة	فلس	دينار	فلس	دينار	دينار
1	<p>توريد وتركيب مظلة معدنية خارجية وحسب المخططات المرفقه وتكون ابعاد المظلة (4*6 م) والسعر يشمل توريد وتركيب جميع المواد التالية واللحام والدهان التأسيسي وجه واحد ووجهين زيتي مقاوم للعوامل الجوية: :- -الاعمده الامامية والموسطية والخلفية حسب المخططات المرفقه شاملا حفر القواعد وصب الخرسانه بقوة كسر ٢٥٠ كغم/سم^٢ شاملا عمل Steel Plate سماكة ١سم بأبعاد (20*20 سم) شاملا البراغي لتثبيت ال I.Beams . -الجوائز (العوارض الطولية والجانبية والعرضية للسقف تيوب معدني حسب المخططات المرفقه. -عمل قواطع معدنية كل ٨٠ سم بالاتجاه العرضي تتكون من تيوب معدني حسب المخططات المرفقه. -الواح الزينكو المظله سماكة ٠,٠٦ ملم. براغي لتثبيت الصاج من النوع الذي لا يصدأ شاملا تركيب كسكيت بلاستيكي اسفل البراغي.</p> <p>ويكون الكيل بالمتر المربع افقيا من الطرف الداخلي للعمود ولا يؤخذ الميل بعين الاعتبار وذلك حسب المخططات المرفقة وتعليمات المهندس المشرف والسعر يشما ايضا الحفريات اللازمه والطعم و توريد وصب القواعد الخرسانية للمظله عدد (٤) وكذلك لقواعد المضخات عدد (٢) والمدات الارضيه وجميع الاعمال وحسب المخططات المرفقه من الخرسانة المسلحة بقوة كسر لا تقل عن ٢٥٠كغم/سم^٢ شاملا حديد التسليح وجميع الاعمال التابعه</p>	مقطع	1					
2	<p>تقديم وبناء جدران طوب أسمنتية مفرغ ٢٠*٢٠*٤٠ سم لجدران المظله المعدنيه مصبوب من خرسانة لا تقل مقاومة الكسر عن (35كغم/سم^٢) بعد (٢٨) يوم والسعر يشمل القموط العلوية والسفلية من الخرسانة المسلحة ولا تشمل حديد التسليح مع جميع ما يلزم لإنجاز العمل على اكمل وجه حسب المخططات والموصفات شاملا" القصاره من مونه الأسمنت والرمل بنسبة ١:٤ للوجهين الأولين ونسبة ١:٣ للوجه الأخير شاملا" جميع ما يلزم</p>	م ^٢	80					
3	<p>تقديم وتركيب أبواب حديد فاصون مقطع (١,٥) انش كبس على الوجهين من صاج سماكة (1.5 ملم) والسعر يشمل جميع القطع المعدنية اللازمه وأسافين الحديد والفاطة والغال سيلندر والدهان الزيتي ثلاثة وجوه وجميع ما يلزم لإنجاز العمل على اكمل وجه بموجب المخططات والمواصفات وتعليمات المهندس: باب قياس ١*٢م لغرفة اللوحات ضمن المظله المعدنيه</p>	عدد	1					
	المجموع ينقل لما بعده							

الرقم	بيان الاعمال	وحدة الكيل	الكمية		سعر الوحدة		المبلغ الاجمالي	
			رقما وكتابة	فلس	دينار	فلس	دينار	فلس
	الأعمال الكهربائية تنفذ التمديدات الكهربائية بالأقطار المناسبة بموجب المخططات والمواصفات إن الأسعار الفردية لأعمال التمديدات الكهربائية تشمل التوصيلات من لوحة التوزيع إلى جميع النقاط وجميع المواد والعمال لإنجاز العمل حسب الأصول وعلى أكمل وجه بموجب المخططات والمواصفات وتكون مواسير التمديدات الكهربائية داخل المظله نوع مواسير بنسر قطر ٨/١ انش بشكل مكشوف شاملا التثبيت داخل المظله وحسب تعليمات وموافقة المهندس المشرف شاملا نقاط الانارة مهما بلغ عددها وكما يلي:-							
4	تقديم وتركيب لوحة توزيع تحتوي على ستة قواطع أوتوماتيك والسعر يشمل جميع المواد والأعمال بموجب المخططات والمواصفات وتعليمات المهندس.	عدد	1					
5	توريد وتركيب كابيل تغذية للمظله (P.V.C) قياس (٦×٥) ملم ٢ مع جميع ما يلزم شاملا التوصيل مع مصدر تزويد الكهرباء	م . ط	70					
6	توريد وتركيب إبريز فاز واحد (١٠) أمبير مؤرض.	عدد	3					
7	توريد وتركيب إبريز (٣) فاز (٣٢) أمبير مؤرض.	عدد	2					
8	توريد وتركيب وحدة انارة زئبقية ذات ذراع قصير مع لمبة زئبقية قدرة ١٢٥ واط شاملا التوصيل والتركييب مع جميع مايلزم. لداخل المظله وخارجها	عدد	2					
9	تقديم وتركيب نقطة إنارة جدارية (جلوب) مع لمبة ١٠٠ شمعة.	عدد	4					
	المجموع ينقل لما بعده							

الرقم	بيان الاعمال	وحدة الكيل	رقما وكتابة	فلس	دينار	فلس	دينار
10	توريد وتركيب وعمل نظام تأريض ارضي للوحات الكهربائية جميعها وللمضخات السطحية وكل ذلك حسب المواصفات الفنية وكما هو وارد في جداول الكميات وحسب تعليمات المهندس المشرف.	مقطوع	1				
11	توريد وتركيب مجموعة تجهيزات البئر والربط على فوهة البئر،شاملا" اللحام والعزل والقص والتركييب وجميع الاعمال اللازمه علماً أن الضغط الاسمي للمفاتيح والقطع ٢٥ بار .						
أ	محبس قطر ٤" (D.FL.Gate Valves) (احدهما على مخرج البئر والثاني على خط السحب من الخزان)	عدد	2				
ب	عداد مياه ميكانيكي قطر ٢" : (Water Meter Mech. Type)	عدد	1				
ت	رداد قطر ٦" (D.FL.Check Valves) مع المصفاه + مأخذ عينه حنفيه ١/٢"	عدد	1				
ث	مفتاح للغسيل قطر ٤" (D.FL.Gate Valves) شاملا توريد وتركيب مواسير بولي اثيلين قطر ١٢٥ ملم مدفونة بطول تقريبي ١٥ م شاملا" الحفر والطمم واعادة الوضع والمصبب نهاية خط الغسيل وحسب المخططات المرفقه.	عدد	1				
12	توريد وتركيب وتشغيل خزان مياه معدني سعة ٢٥ م ^٣ شاملا الربط مع فوهة البئر وخط السحب والسعر يشمل القواعد الخرسانيه وجميع الاعمال الوارده في المواصفات الفنيه	عدد	1				
13	توريد وتمديد مواسير مياه حديد Black steel قطر ١٠٠ ملم بشكل مكشوف من فوهة البئر ولغاية الخزان المعدني و من الخزان المعدني ولغاية البوستر المقترح و كذلك انشاء خطوط السحب والدفع للمضخات من الخزان المعدني ولغاية المضخات و من المضخات لغاية الخط الرئيسي شاملا الشبك على الخط الرئيسي قطر ٤" والسعر يشمل توريد وتركيب جميع القطع اللازمه والقص واللحام والعزل وجميع ما يلزم	م.ط	50				
	المجموع ينقل لما بعده						

الرقم	بيان الاعمال	وحدة الكيل	رقما وكتابة	فلس	دينار	فلس	دينار
14	استلام من مستودعات شركة مياه اليرموك-حوفا ونقل وتركيب وتشغيل وصيانة وحدات ضخ كهربائية أفقية مع اللوحات الكهربائية بموجب المواصفات ، شاملا عمل خطوط تصريف لمياه تبريد المضخة و استلام وتركيب ووصل من الجهتين كوابل التغذية من لوحة (MDB) لغاية لوحات تشغيل المضخات ... الخ وجميع ما يلزم لإتمام العمل حسب الأصول، شاملا استلام من مستودعات حوفا وتركيب وربط وتوصيل وتجربة وتشغيل كوابل التغذية الكهربائية (من الموقع الذي يحدده المهندس المشرف في موقع العمل) ووصله مع لوحة التوزيع الرئيسية (MDB) شاملاً توريد وتركيب Sleeve من مواسير UPVC قطر ٨" وحفريات الخنادق (٤٠×٦٠) سم والتأمين برمل الصويلح سماكة ١٠ سم أسفل وفوق ال Sleeve والشريط التحذيري والطوب الأسمنتي للحماية سماكة ٧سم وإعادة الطمم مع الدك وإعادة الأوضاع ونقل الأنقاض والسعر يشمل ايضا استلام وتركيب وربط وتوصيل وتجربة وتشغيل وصيانة لوحة توزيع القوى الكهربائية (MDB) شاملا" استلام وتركيب القواطع الكهربائية (CBS) اللازمه لتشغيل المضخة والاناره وأية قواطع فرعية أخرى و/أو مساعدة داخل اللوحة..الخ وتجهيز مدخل كوابل التغذية وجميع ما يلزم لإتمام العمل حسب الأصول، بموجب المواصفات وموافقة المهندس المشرف	مقطوع	2				
14	توريد وتركيب وتوصيل وتشغيل وصيانة على خط السحب وخطوط الدفع مع عمل Thrust Blocks والمرابط بموجب المخططات المفاتيح المبنية تالياً شاملاً الفلانجات المقابلة والكسكيتات والبراغي والصواميل والركائز وكافة الأعمال التابعة كالتالي:						
-	محبس G.V. قطر ٤"، ٢٥ بار	عدد	2				
-	رداد قطر ٤"، ٢٥ بار	عدد	2				
-	ساعات قياس الضغط ٦٠ بار	عدد	2				
-	هواية قطر ١"، ٢٥ بار	عدد	2				
	المجموع ينقل لما بعده						

الرقم	بيان الاعمال	وحدة الكيل	رقما وكتابة	فلس	دينار	فلس	دينار
15	ازالة السياج التالف وتسليمه لمستودعات حوفا و توريد وتركيب سياج معدني مكون من شريط شبكي مزئيق سماكة ٢,٩ملم وفتحة ٥٠٥ سم بالارتفاع المبين على المخططات ويشمل السعر توريد وتركيب أعمدة من حديد (Beam) قياس ٥٠×١٠٠ ملم مثبتة عموديا" كل ثلاثة أمتار بدبش وخرسانة عادية (نسبة الخرسانة ٧٠% و الدبش ٣٠%) ويقوة كسر صغرى لا تقل عن ١٨٠ كغم/سم ^٢ بعد ٢٨ يوما"حسب المخططات والمواصفات والسعر للمتر الطولي لكامل ارتفاع السياج يشمل الحفر وجميع المواد والأعمال بما في ذلك توريد وتركيب وشد ثلاثة أسلاك شائكة على الجزء العلوي المائل واثنان قطريان وكذلك تدعيم الزوايا باتجاهين ودهان الأعمدة بدهان مانع للصدأ ثلاثة وجوه والسعر يشمل توريد وصب وعمل زنار سفلي على طول السياج بعرض ٢٠ سم وارتفاع ٣٠ سم من الخرسانة بقوة كسر صغرى لا تقل عن ١٨٠ كغم/سم ^٢ بعد ٢٨ يوما" شاملا الطوبار وجميع الأعمال اللازمه بموجب الشروط الخاصة والمخططات والمواصفات وحسب تعليمات المهندس المشرف .	م.ط	300				
16	ازالة البوابه القائمه وتسليمها لمستودعات حوفا وتوريد وتركيب بوابة للسياج (٥م×٢م) مكونة من ذرفتين مصنوعة من مواسير ٢" جلفنايز وزن خفيف ومثبت عليها شريط شبكي مزئيق مماثل لشريط السياج من شبك قياسي ٥٠٥ سم سماكة ٢,٩ ملم والسعر يشمل توريد وصب خرسانة مسلحة قوة تحمل ٢٥٠كغم/سم ^٢ شاملا أعمال الحفريات والطوبار للقواعد والزنانير والأعمدة الخرسانية المسلحة ويكون طوبار الأعمدة ٤٠×٤٠ سم بارتفاع ٢,٥ م من الواح فيرفيس أملس والسعر يشمل توريد وتركيب حديد التسليح للقواعد والاعمده والزنانير والسعر يشمل أيضا الحف والدهان وجهان تأسيس ووجهين زياتي والسعر يشمل أيضا تركيب الأيدي والغال والمفصلات والدقورة والقفل وعمل زوايا رأسية وعلوية وجانبية وتثبيتها في الأعمدة للبوابة الرئيسية حسب المواصفات والمخططات وتعليمات المهندس المشرف .	عدد	1				
	المجموع ينقل لما بعده						

الرقم	بيان الاعمال	وحدة الكيل	رقما وكتابة	فلس	دينار	فلس	دينار
17	توريد وفرش ودحل وكوي وعمل خلطة إسفلتية سماكة ٧ سم بعد الدحل حسب تجربة مارشل ، والسعر يشمل تسوية المساحة او الطريق حسب المناسيب المطلوبه ومهما كانت السماكه وذلك بالحفر في أي نوع من انواع التربة والصخر ..الخ ، والسعر يشمل التصرف بناتج الحفريات للطعم ضمن الموقع وفي حالة عدم صلاحية أو كفاية ناتج الحفريات يتم الطعم من مواد مختاره وتذك وترص جيدا" بواسطة المداحل مع الرش بالماء والدحل لدرجة رك ٩٥% حسب تجربة البروكتور المعدل ، ويشمل السعر توريد وخلط وفرش طبقة أساس من البيس كورس (B.C) سماكة ٢٠ سم بعد الدحل مع الرش بالماء ويخلط ويدحل جيدا" بمدحله إرتجاجية للحصول على درجة دك لا تقل عن ١٠٠% حسب تجربة البروكتور المعدل والفرد يجب أن يكون بواسطة الجريد مع مراعاة الميول لتصريف مياه الأمطار ، ويشمل السعر توريد ورش الوجهة التأسيسي (M.C-70) بمعدل ١,٥ كغم /م ^٢ مع عمل التجربة ويجب الرش بالرشاش الميكانيكي شاملا جميع الفحوصات اللازمة وحسب المواصفات وتعليمات المهندس المشرف .	٢م	200				
	المجموع ينقل لما بعده						

الرقم	بيان الاعمال	وحدة الكيل	رقما وكتابة	فلس	دينار	فلس	دينار
19	توريد المواد وعمل الصيانه اللازمه لغرفة المشغل والوحده الصحيه القائمه وحسب الابعاد القائمه حيث تتضمن اعمال الصيانه دهان غرفة المشغل من الداخل دهان املشن وعمل الصيانه اللازمه للابواب والشبابيك ودهان الابواب وصيانة التمديدات الكهربائية واستبدال وحدات الاناره التالفه ويشمل العمل ايضا ازالة البلاط والمرحوض والمغاسل والحنفيات والتمديدات من الوحده الصحيه القائمه بالابعاد القائمه والتصرف بناتج الازاله خارج الموقع شاملا توريد وتركيب بلاط للارضيات والجدران واعادة انشاء تمديدات الكهرباء وتوريد وتركيب وحدة اناره مدلاه واعادة انشاء تمديدات المياه وتمديدات الصرف الصحي وشبكها وتوريد وتركيب مرحاض عربي و مغسله وحنفيه خلاط ساخن بارد شاملا التوصيل مع التمديدات والسعر يشمل توريد وتركيب جميع المواد اللازمه لتشغيل الوحده الصحيه والسعر يشمل ايضا توريد وتركيب جيزر كهرباء سعة ٥٠لتر على الاقل شاملا التوصيل مع شبكة المياه ومع مصدر الكهرباء .	مقطوع	1				
	المجموع النهائي						


المجموع كتابية"	المجموع رقما"		بيان الاعمال	الرقم
	دينار	فلس		
			مجموع قيمة الاعمال	1
			المجموع الكلي	
			تنزيل أو زيادة	
			المجموع الكلي بعد التنزيل أو الزيادة	

فقط دينار لا غير .

اسم وتوقيع المقاول :


التاريخ : / /


مقطع للسياح

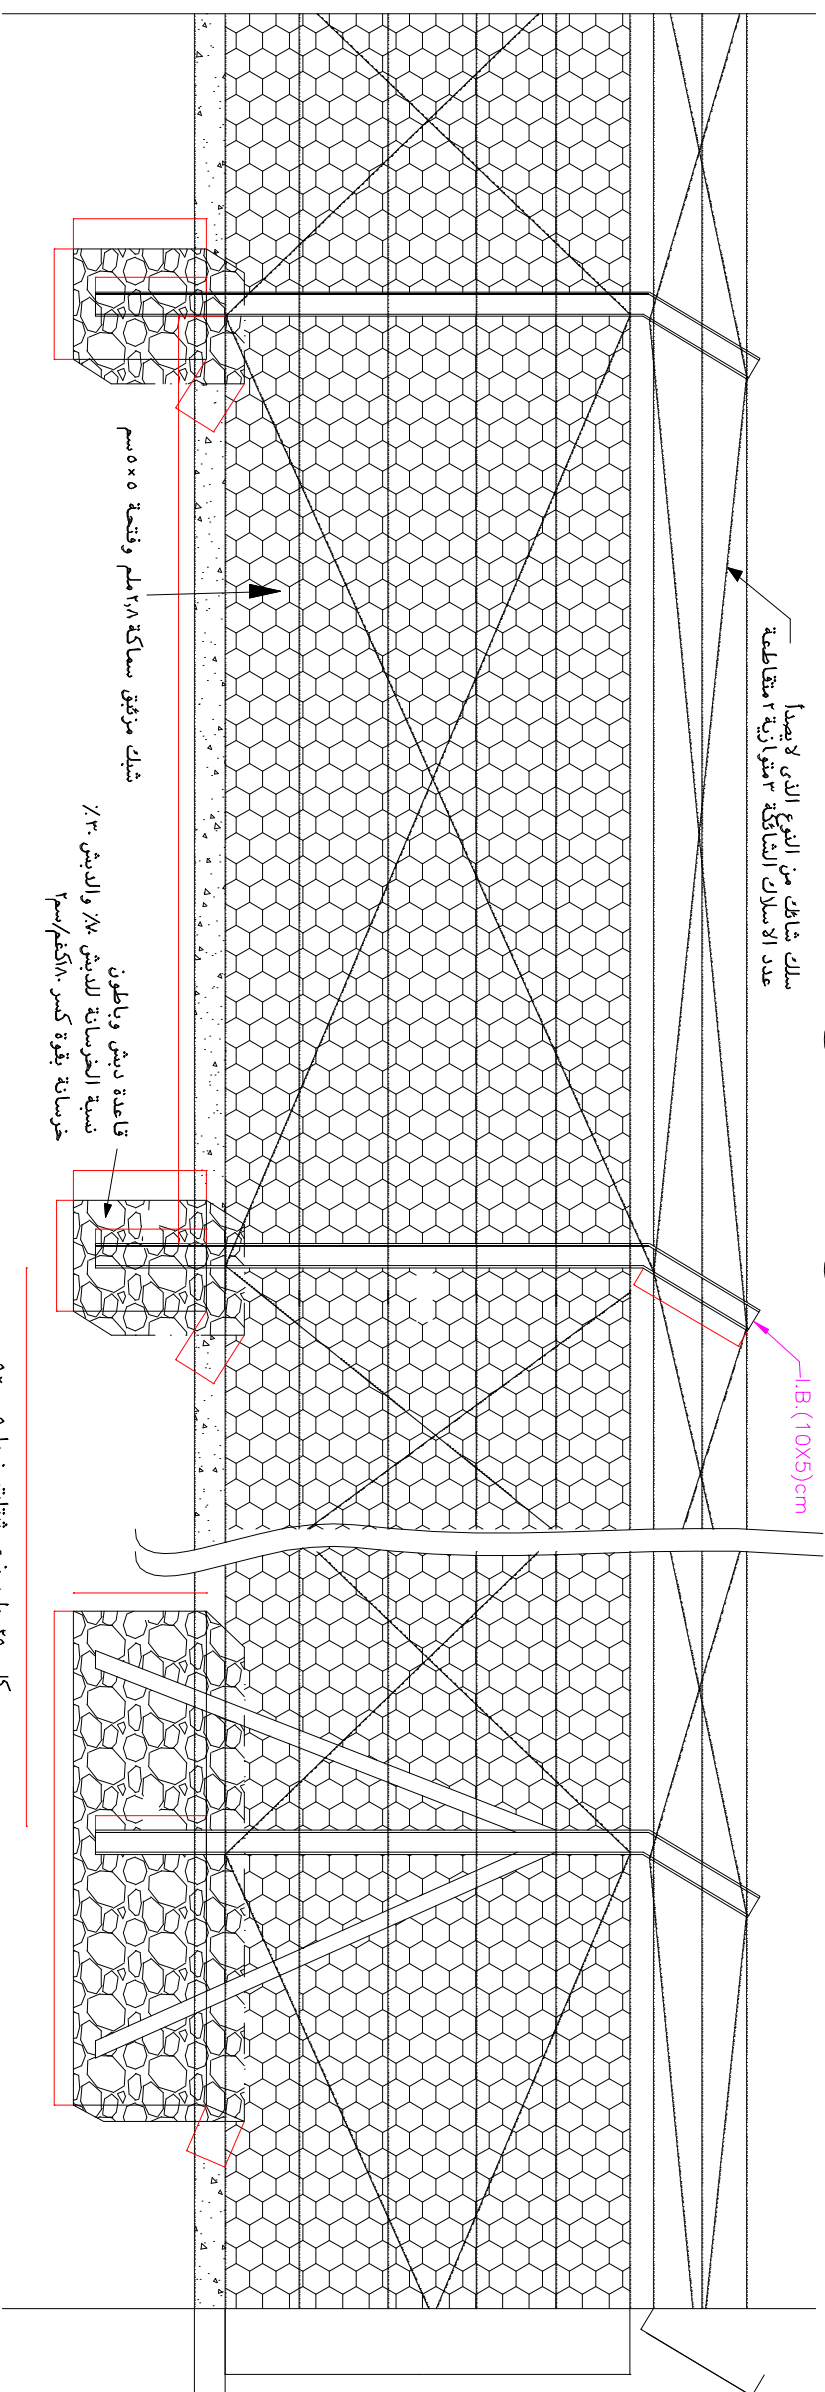

Rev	Description	By	Date	App

Purpose of Issue	Rev	Date	Approved

Client: 


Consultant: 

Project:
 Title: **مقطع للسياح**

Designer	Drawn	Checked

Scale	As Shown	Date	Approved

Drawing Number: **METERS** Rev: **6**

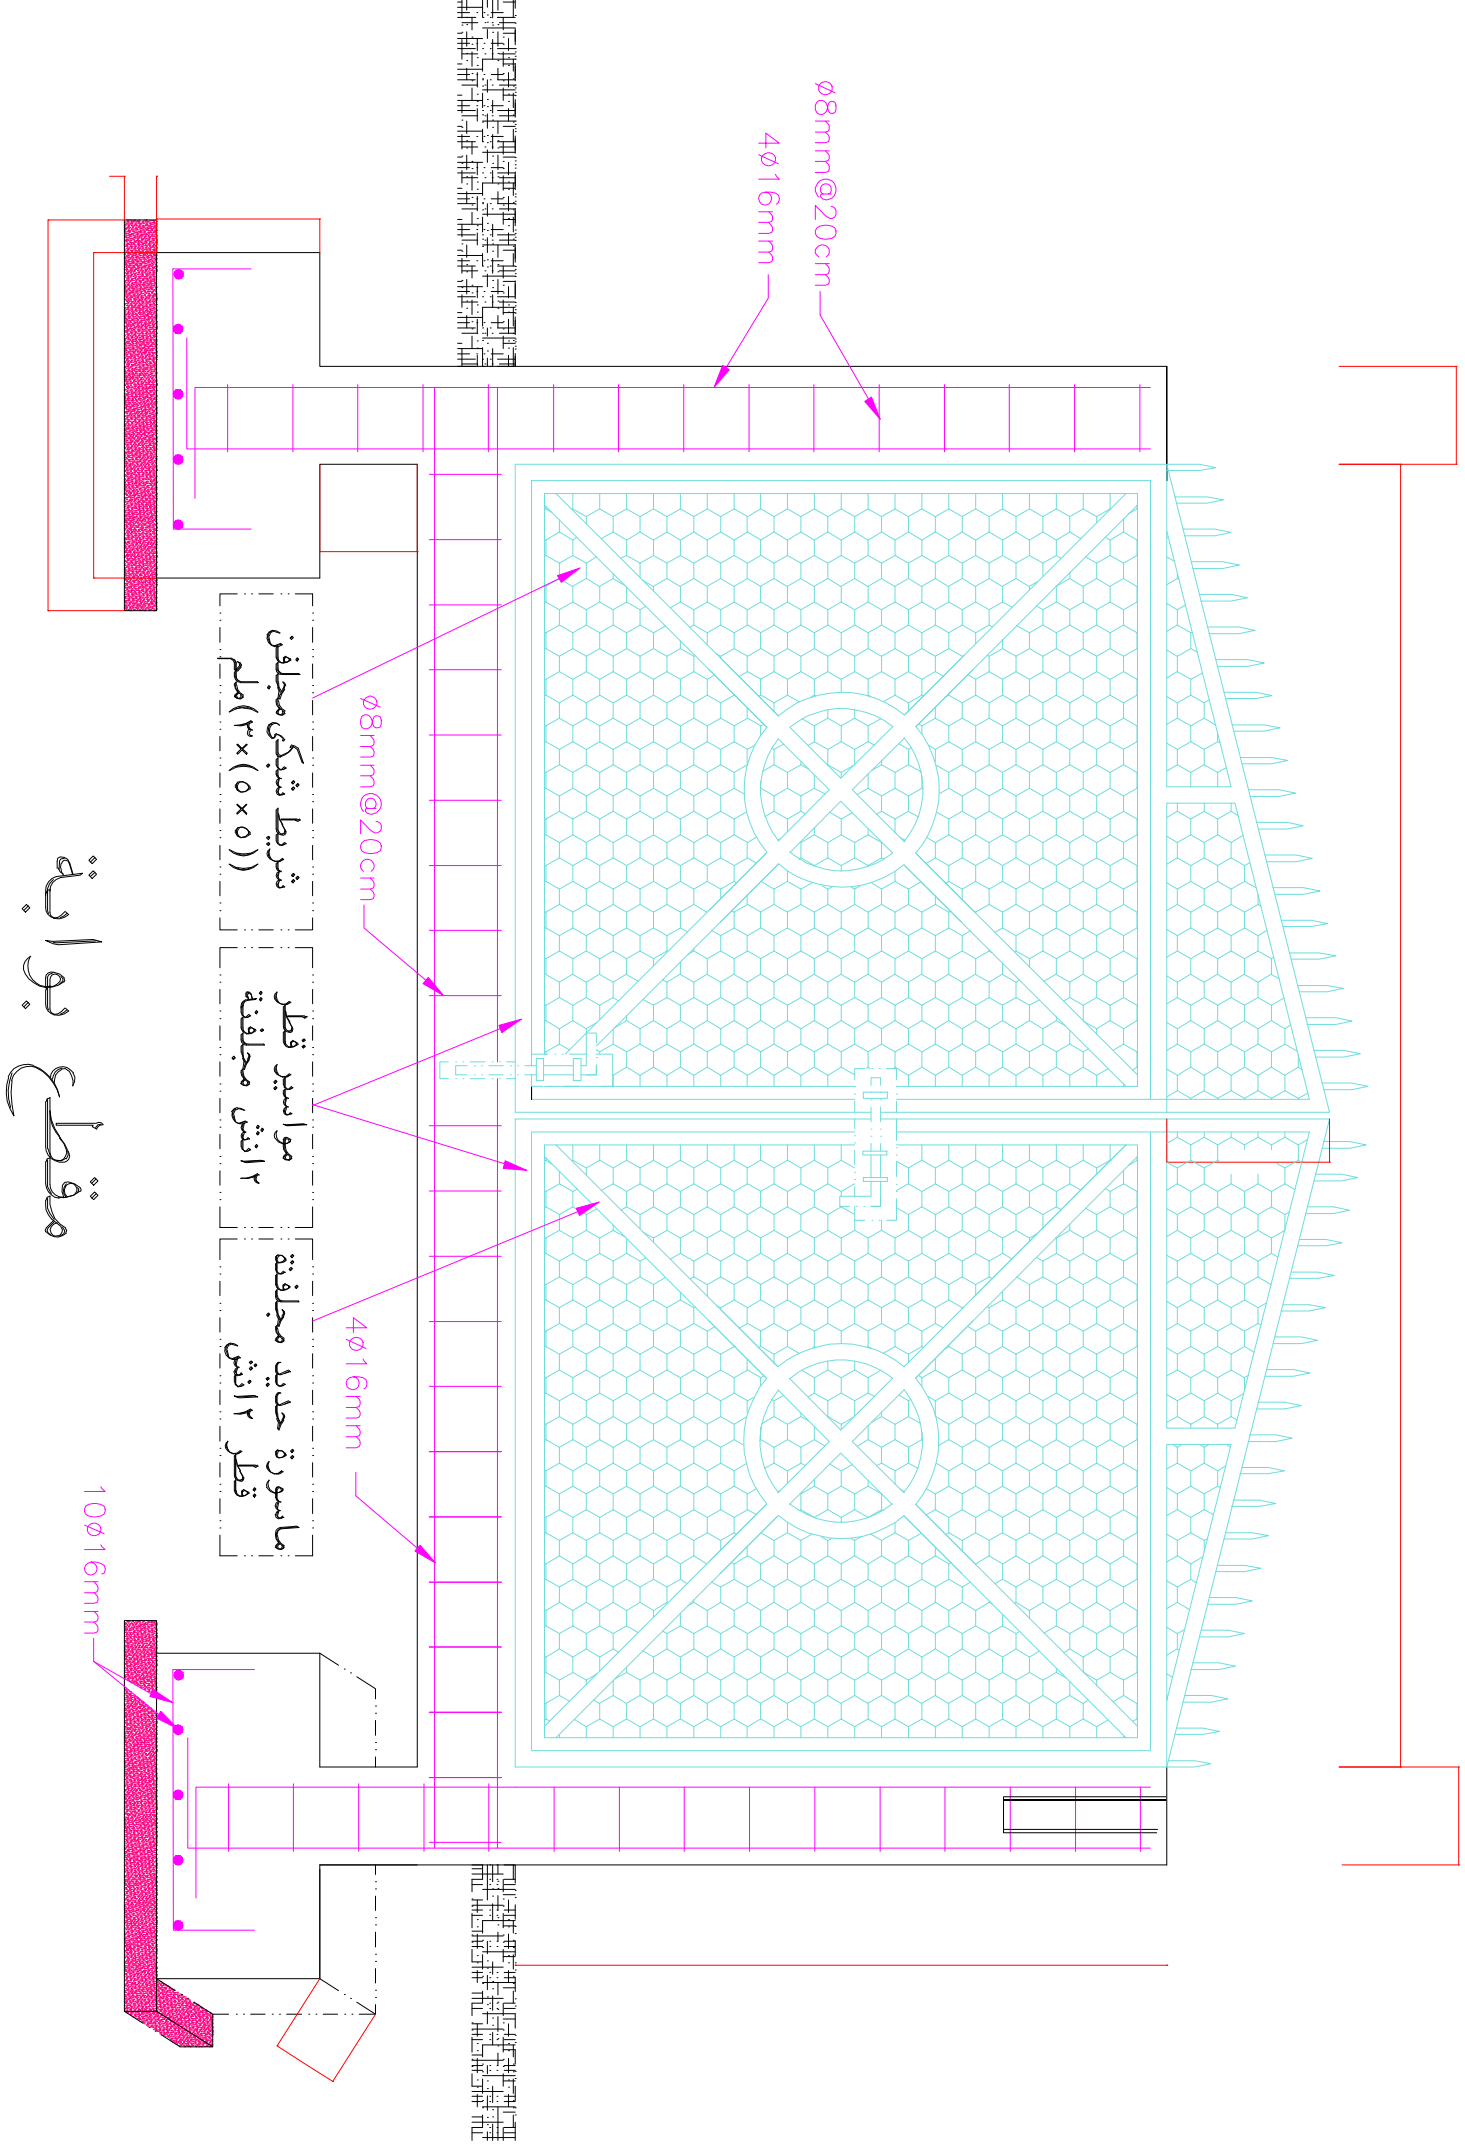

Rev.	Description	By	Date/Chk.	App.

Client: THE HASHEMITE KINGDOM OF JORDAN
MINISTRY OF WATER & IRRIGATION
YARMOUK WATER CO. (م.إ.إ.إ.)



Project: مقطع عرضي لبوابة خارجية

Title:


Design: Drawn: Checked:
Scale: AS SHOWN Date: Approved:

M E T E R S

Drawing Number: 6 Rev: 6

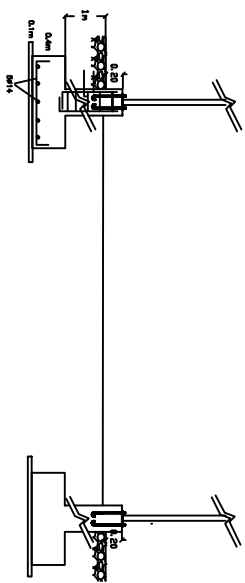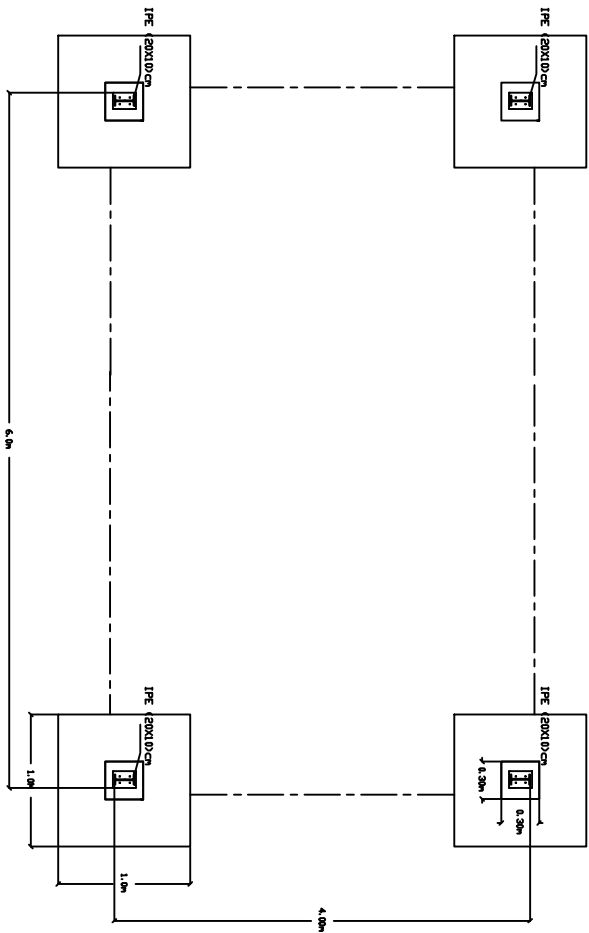



No.	Description	By	Date	Appr.

Client: **THE HAQBAHTE REGION OF AGRARIAN UNIVERSITY OF WATER & SURVEILLANCE YAMOUK KATIM GOV. L.L.C**
 Consultant: 

Project: **مفاعل عرضي لحالة متدنية لمعالجة مياه سطحية**
Title:

Design:	Drawn:	Checked:
Scale:	As shown	As shown
Date:		

Drawing Number: 817143
 Page: 6

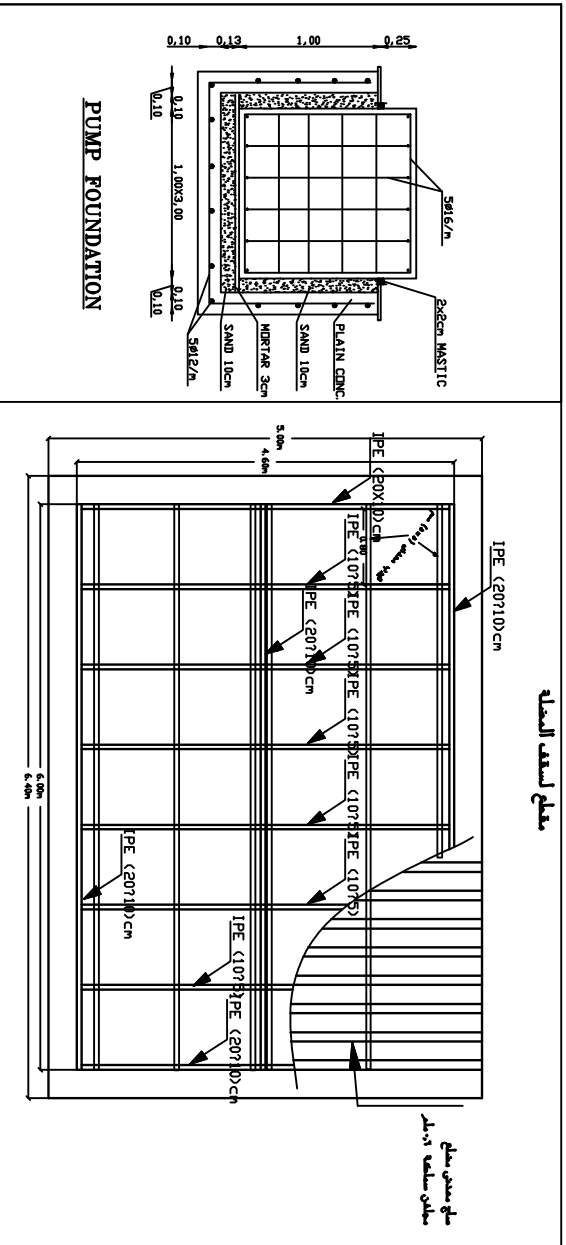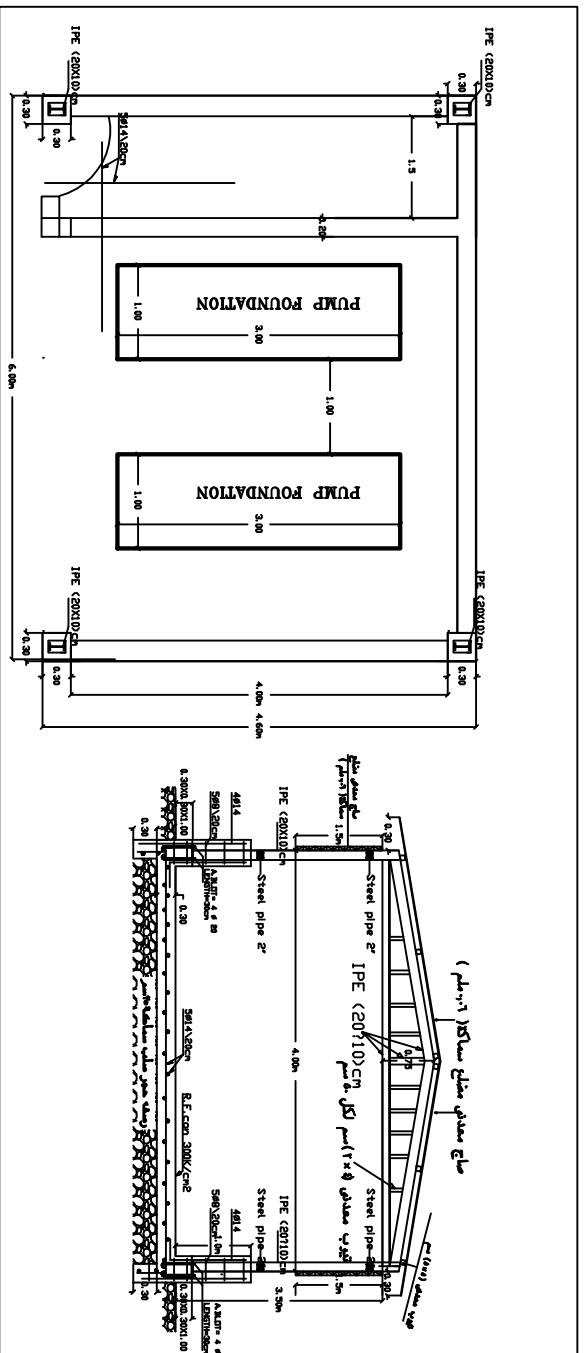

مقطع لسقف الأساس

مقطع لسقف الأساس

Date:		By: / Date:		Checked:	
Description:		Project of Issue:		Approved:	
		Title:		Scale:	
		Client:		Project:	
		THE MANAGEMENT CONSULTING OF AQUARIUM		Date:	
		UNIVERSITY OF WATER & WASTEWATER		Sheet:	
		VANAROCK WATER CO. S.A.S		Total:	
		Comments:		5	
		Project:		6	
		Title:		7	
		Design:		8	
		Scale:		9	
		Project:		10	
		Date:		11	
		Sheet:		12	
		Total:		13	

مقطع عرضي لحدالة مخرنية
لمنحة مياه سطحية